

AD 711838

0

THE UNIVERSITY OF MICHIGAN



Memorandum 28

C O N C O M P

June 1970

**CAMA: DEFINE PROBLEM COMMAND**

Suzanne D. Goodrich

This document has been approved  
for public release and sale; its  
distribution is unlimited

ERIC Clearinghouse  
CLEARINGHOUSE  
Full Text Provided by ERIC

DDC  
REF ID: A621120  
SEP 24 1970  
RECORDED  
C

34

**T H E   U N I V E R S I T Y   O F   M I C H I G A N**

**Memorandum 28**

**CAMA: DEFINE PROBLEM COMMAND**

**Suzanne D. Goodrich**

**CONCOMP: Research in Conversational Use of Computers  
F.H. Westervelt, Project Director  
ORA Project 07449**

**supported by:**

**ADVANCED RESEARCH PROJECTS AGENCY  
DEPARTMENT OF DEFENSE  
WASHINGTON, D.C.**

**CONTRACT NO. DA-49-083 OSA-3050  
ARPA ORDER NO. 716**

**administered through:**

**OFFICE OF RESEARCH ADMINISTRATION   ANN ARBOR**

**June 1970**

## TABLE OF CONTENTS

1. Introduction . . . . .	1
2. User's Guide for Command DPRQB . . . . .	1
2.1. Data Structure . . . . .	2
2.1.1. Master Directory Entries . . . . .	2
2.1.2. Data Packs . . . . .	4
2.2. General Execution Structure. . . . .	5
2.3. Subroutines Used in DPRQB Command. . . . .	22
3. References . . . . .	31

## 1. INTRODUCTION

The Computer-Aided Mathematical Analysis system (CAMA) permits construction of symbols and expressions, manipulation of expressions, and solution of equations. CAMA operates under MTS in the IBM 360/67 and RAMP in the PDP-8/338 terminal. CAMA operations are divided into tasks which may be inserted into the queue via commands.

## 2. USER'S GUIDE FOR COMMAND DPRØB

The command DPRØB is used to define a problem. Execution of this command causes a flag to be set so that a second specification of the command is ignored until the first request is completed. The command has four branches: (1) construct symbols, (2) select symbols for a problem, (3) define expressions for a problem, (4) escape to return to the CAMA system.

### (1) Construct symbols.

The user specifies the menu into which the generated symbol will be placed. He constructs and names the symbol. Options exist during construction for erasing the existing symbol and starting again or rejecting the entire stage. If the user duplicates a symbol name, he may rename the symbol or destroy the old definition as he wishes.

### (2) Select Symbols for Problem.

The user specified a problem. If the problem

exists and contains symbols, the symbols are displayed. The user selects entire menus or particular symbols from menus to be included in his problem. He may remove one or all symbols from his problem. A maximum of 63 symbols may be included in one problem.

(3) Define Expressions for a Problem.

The user specifies a problem and the problem symbols are displayed. He may display, modify, and save or destroy an existing expression of the problem, or create and save a new expression.

## 2.1 DATA STRUCTURE

### 2.1.1. Master Directory Entries

The command DPRØB uses entries MSYMTBL, MPROB, NAMEFLAG, and PRØBLEM (see Fig. 1) in the master directory and the corresponding packs. MSYMTBL is a name-list containing the names of all menus, both system menus and user-named menus containing user-created symbols, and pointers to the menu packs. The menu packs are lists of symbols in the menu and pointers to the data pack which contains the display file for the symbol.

MPRØB is a list of problems and corresponding pack pointers. A problem pack is an association table identifying the symbols in a problem. The association object is the symbol name, and the value is the name of the menu

Entries in  
Master Directory

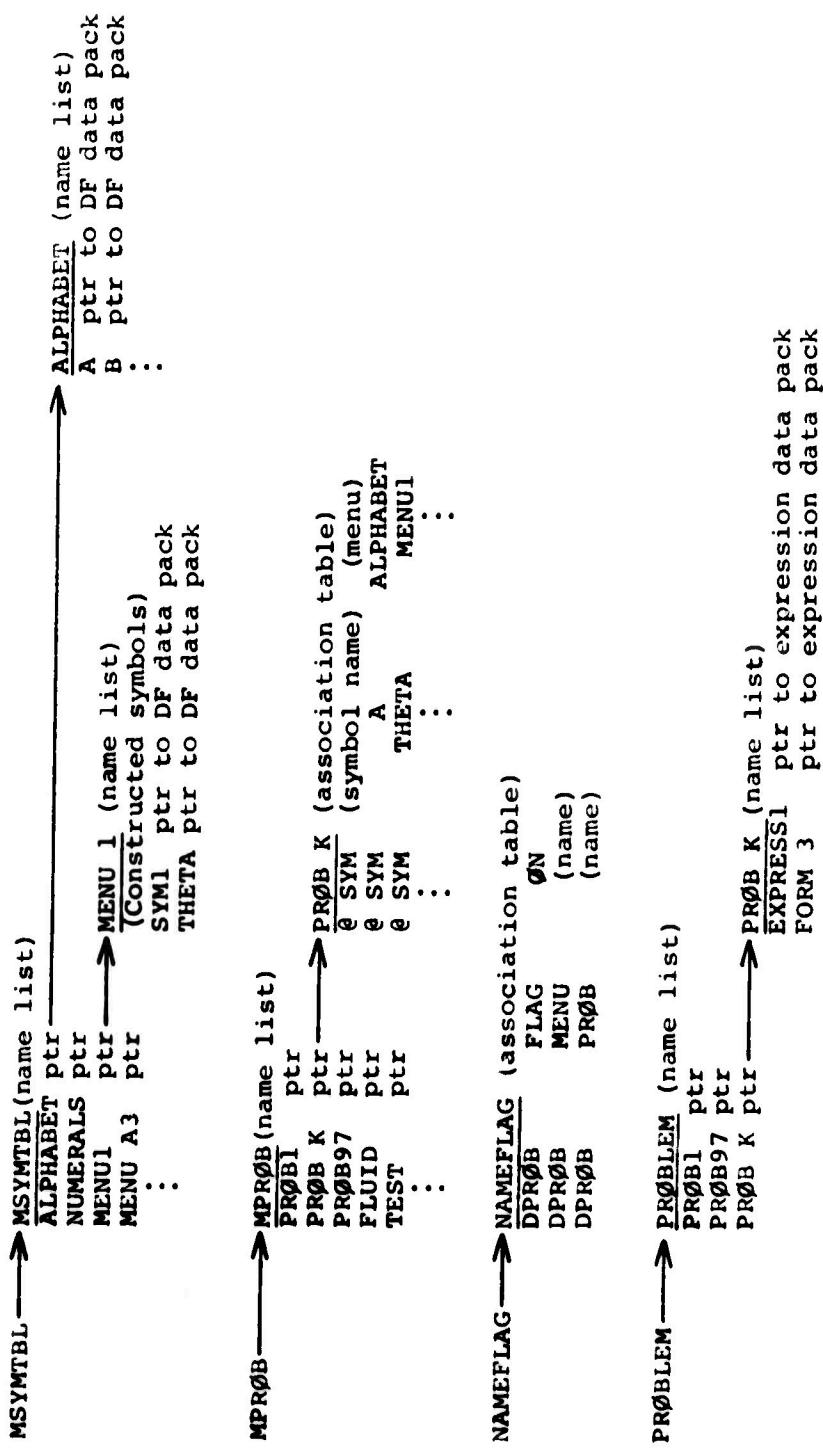


Figure 1. Entries in Master Directory

containing the symbol.

The NAMEFLAG entry in the master directory points to an association table which identifies the current problem and menu, and indicates the availability of this command.

PROBLEM is a name-list of problems and the corresponding pointers. The problem packs are name-lists of expressions in the specific problem and pointers to the data packs defining the expressions.

#### 2.1.2. Data Packs

The first ten words of the symbol display file data pack are the display file header (PSECT2 of the DF routines<sup>1</sup>). Byte 1 of word 1 and words 6, the buffer location pointer, 7, the PDP-8 word count, and 9, the first location of the actual buffer, must be set to appropriate values before the display file is transmitted. Switch 1 which is byte 1 of word 1 should be set to  $40_{16}$  so the DF routines will not modify the last location of the display file. The remainder of the data pack contains the display file with one 338 word stored in two bytes using six bits in each byte, as described and illustrated in Appendix C of The DF Routines User's Guide<sup>1</sup>.

Data packs are also used to define the expression with one 20-byte entry for each symbol of the expression (see Fig. 2).

X	Y	symbol name	scale	(free)	entity no.	(free)
2	2	8	2	2	2	2

bytes

Figure 2.

The entry contains the X and Y coordinates of the symbol in raster points, the symbol name, the scale for the symbol in range 1-3, and the entity number. (The entity number is not used in command DPRØB and will be discussed in greater detail when relevant.)

## 2.2 GENERAL EXECUTION STRUCTURE

The general sequence of execution of command DPRØB is illustrated in Fig. 3. Successive tasks are executed in the central computer in response to light button requests until the user chooses to exit from the command.

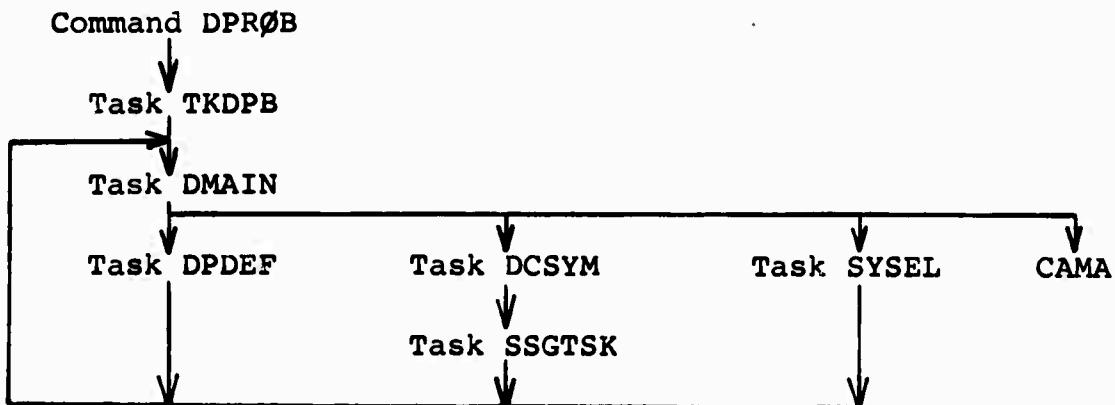


Figure 3.

### Task TKDPB

Task TKDPB examines the NAMEFLAG association table.

If the association

DPRØB      FLAG      ØN

is present, a comment

TASK IN CURRENT USE ... NEW REQUEST IGNORED.

is printed and a return is made to the CAMA system. If the flag association is not present, the task DMAIN is executed.

### Task DMAIN

The DMAIN task is the main branching stage. The light buttons

ESCAPE

PRØBLEM DEFINITIØN

CONSTRUCT SYMBØLS

SELECT SYMBØLS FØR PRØBLEM

are displayed. The user indicates the desired option with the Grafacon. If the user chooses to exit command DPRØB via the ESCAPE button, all DPRØB entries in the NAMEFLAG table are erased and a return is made to the CAMA system.

### Task DPDEF

Task DPDEF is the response to the PROBLEM DEFINITION light button of task DMAIN. The execution of DPDEF is outlined in Fig. 4. The display screen is illustrated in

Fig. 5.

#### Task DCSYM

Task DCSYM is the response to the CONSTRUCT SYMBOLS light button. The 360 program which generates and transmits the display files is outlined in Fig. 6. The PDP-8 programs, specifically the actual symbol construction program, will be discussed in a subsequent memo<sup>2</sup>. The display screen is illustrated in Fig. 7.

#### Task SSGTSK

The SSGTSK task moves the display file for the constructed symbol from a line directory to a data pack as described in Section 2.1.2. Execution of the task will be discussed in another memo<sup>2</sup>.

#### Task SYSEL

Task SYSEL is executed as the response to the SELECT SYMBOLS FOR PROBLEM light button. The subroutine is outlined in Fig. 8. A maximum of 63 symbols may be selected for a problem. The display screen is illustrated in Fig. 9.

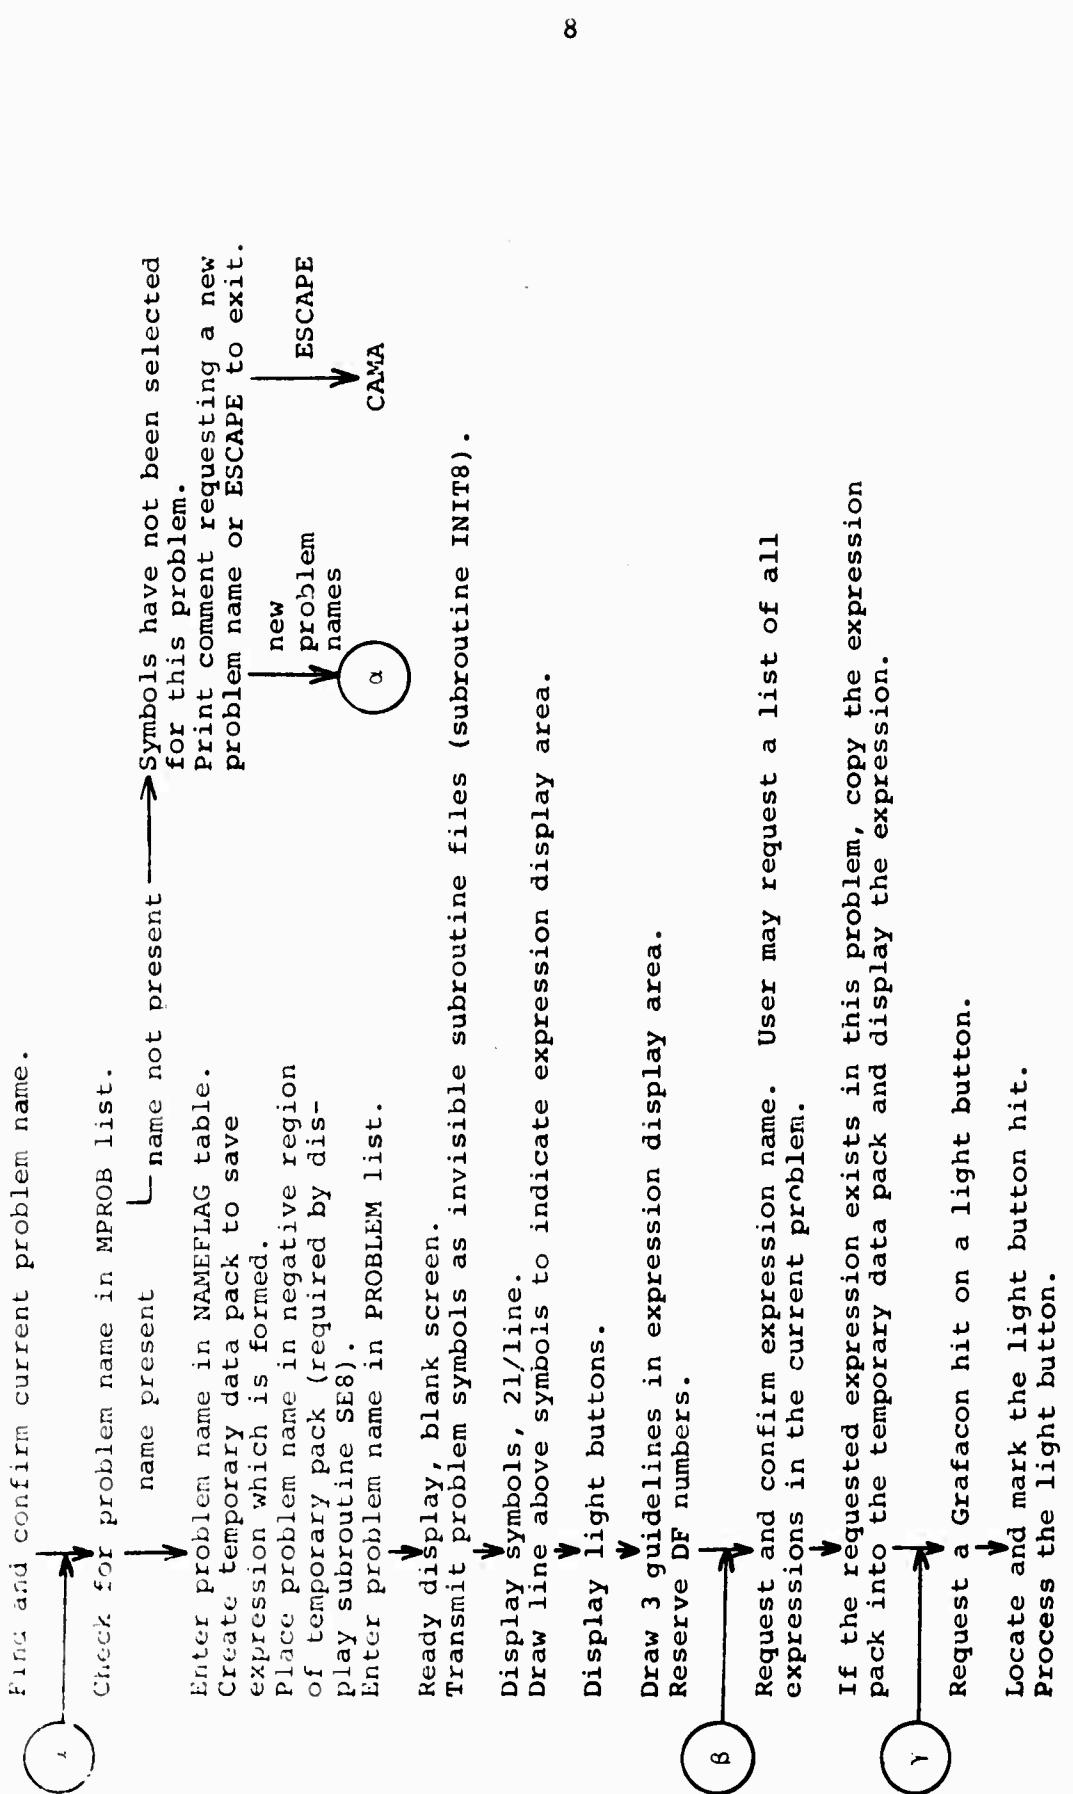


Figure 4. Subroutine DPDEF

LIGHT BUTTONS

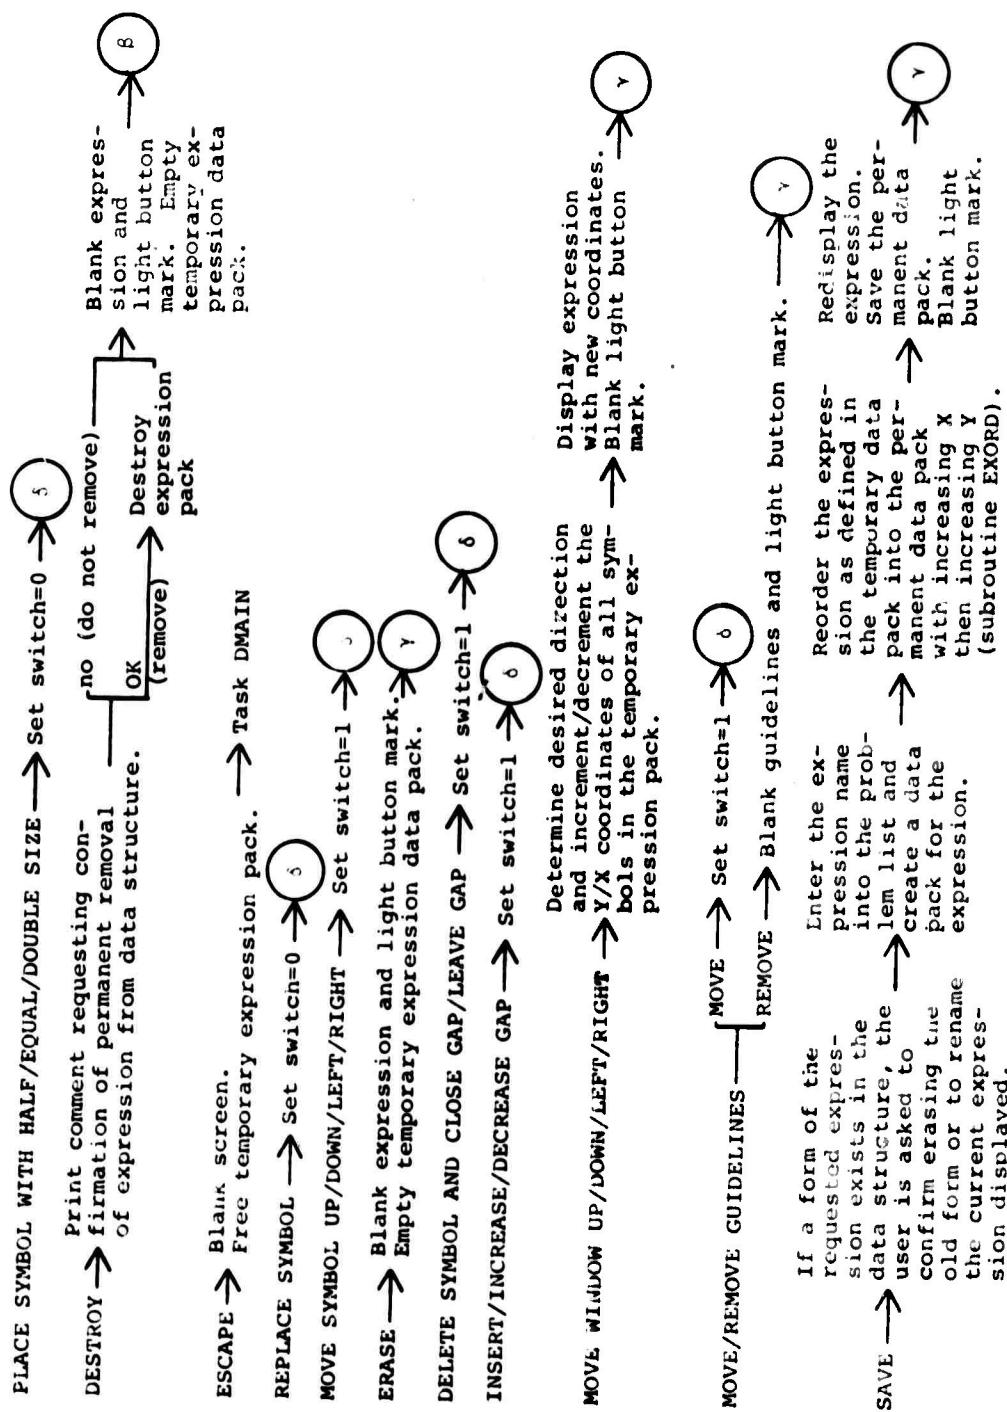


Figure 4. Subroutine DPDEF, continued

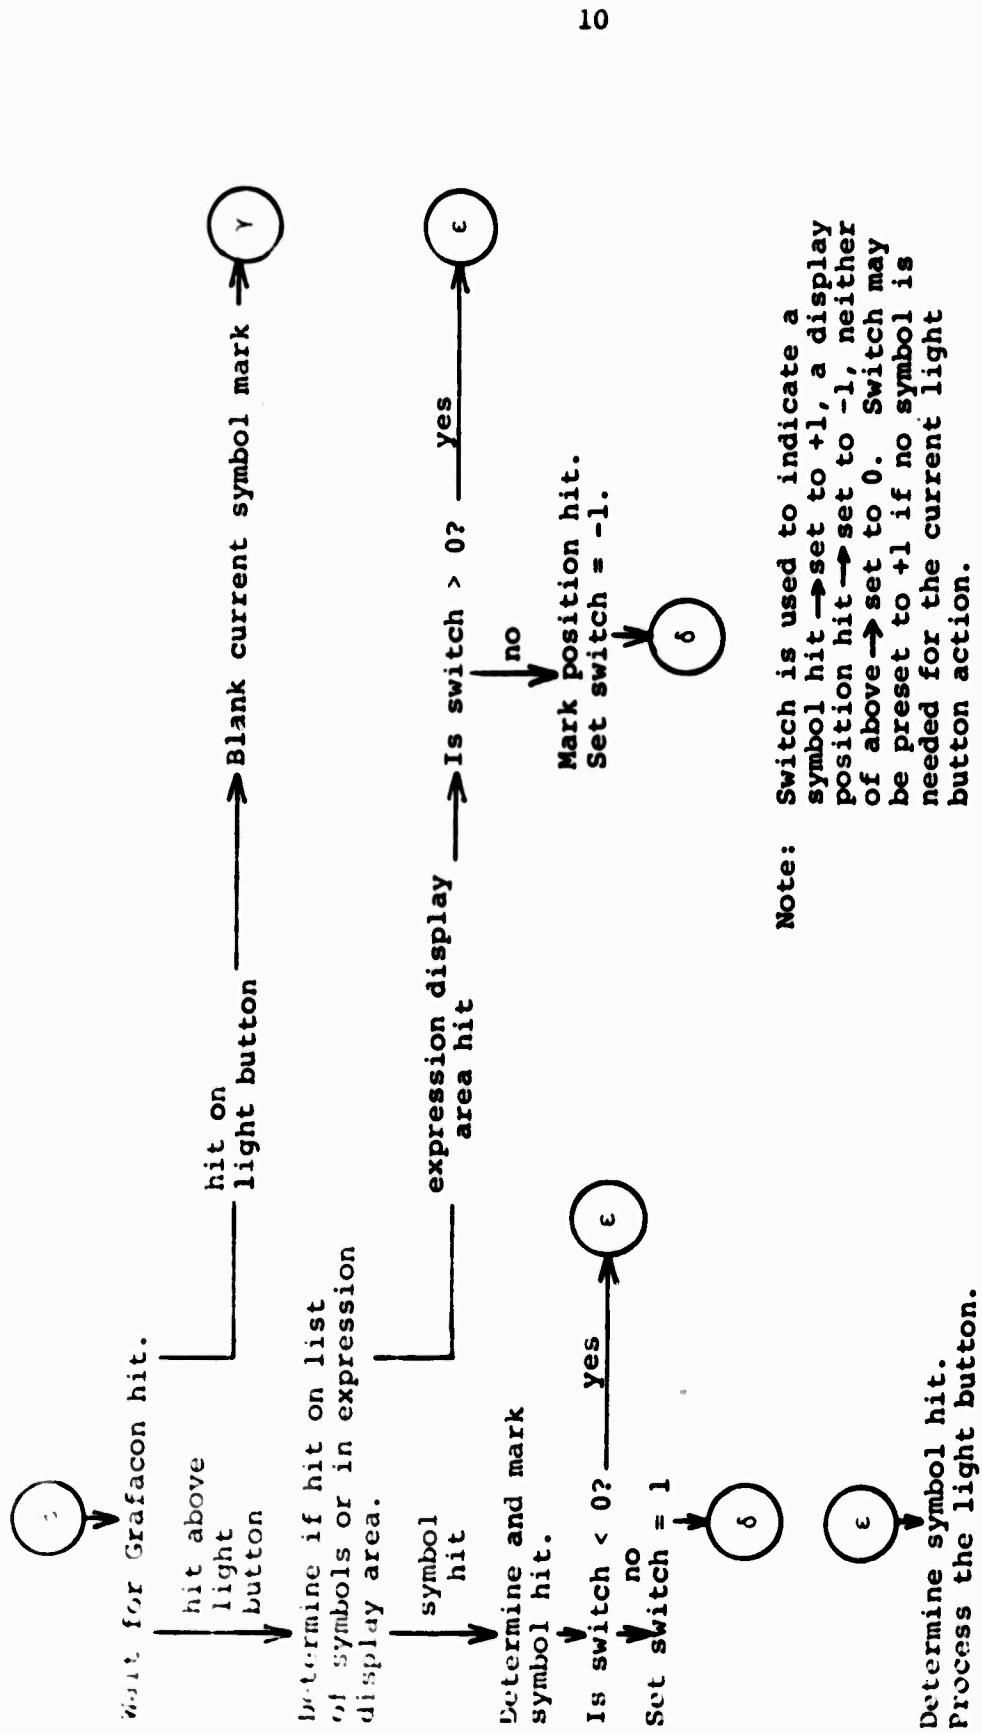


Figure 4. Subroutine DPDEF, continued

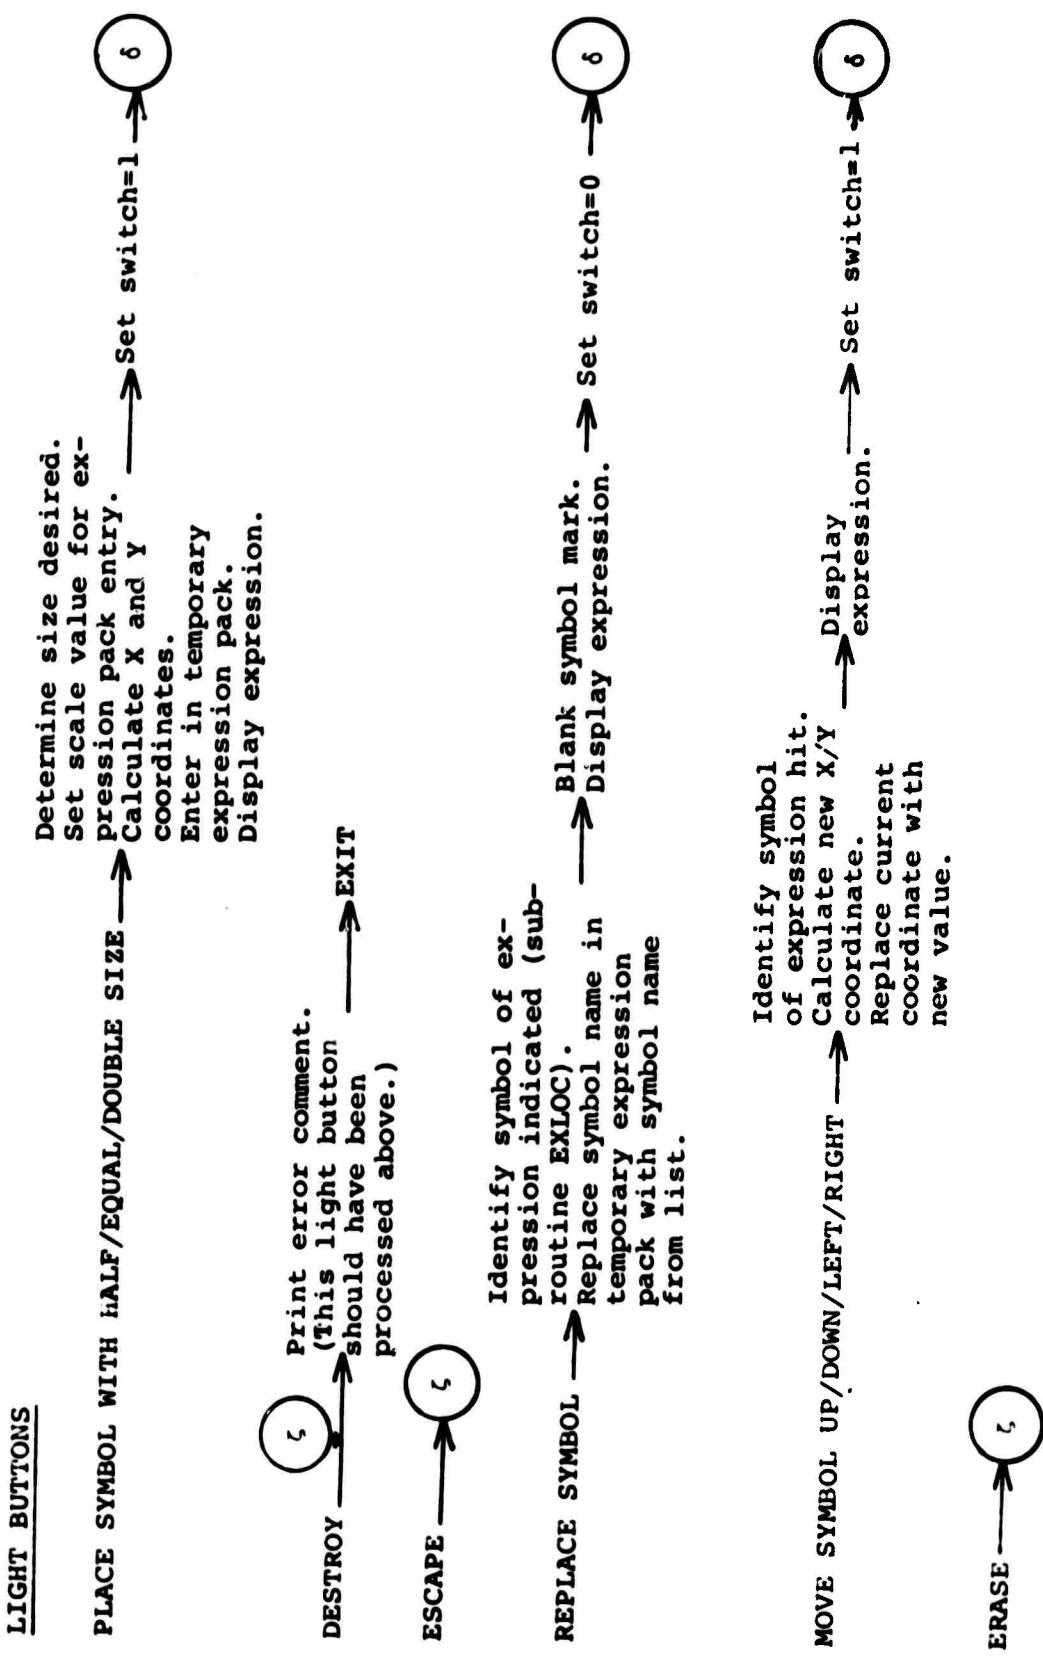
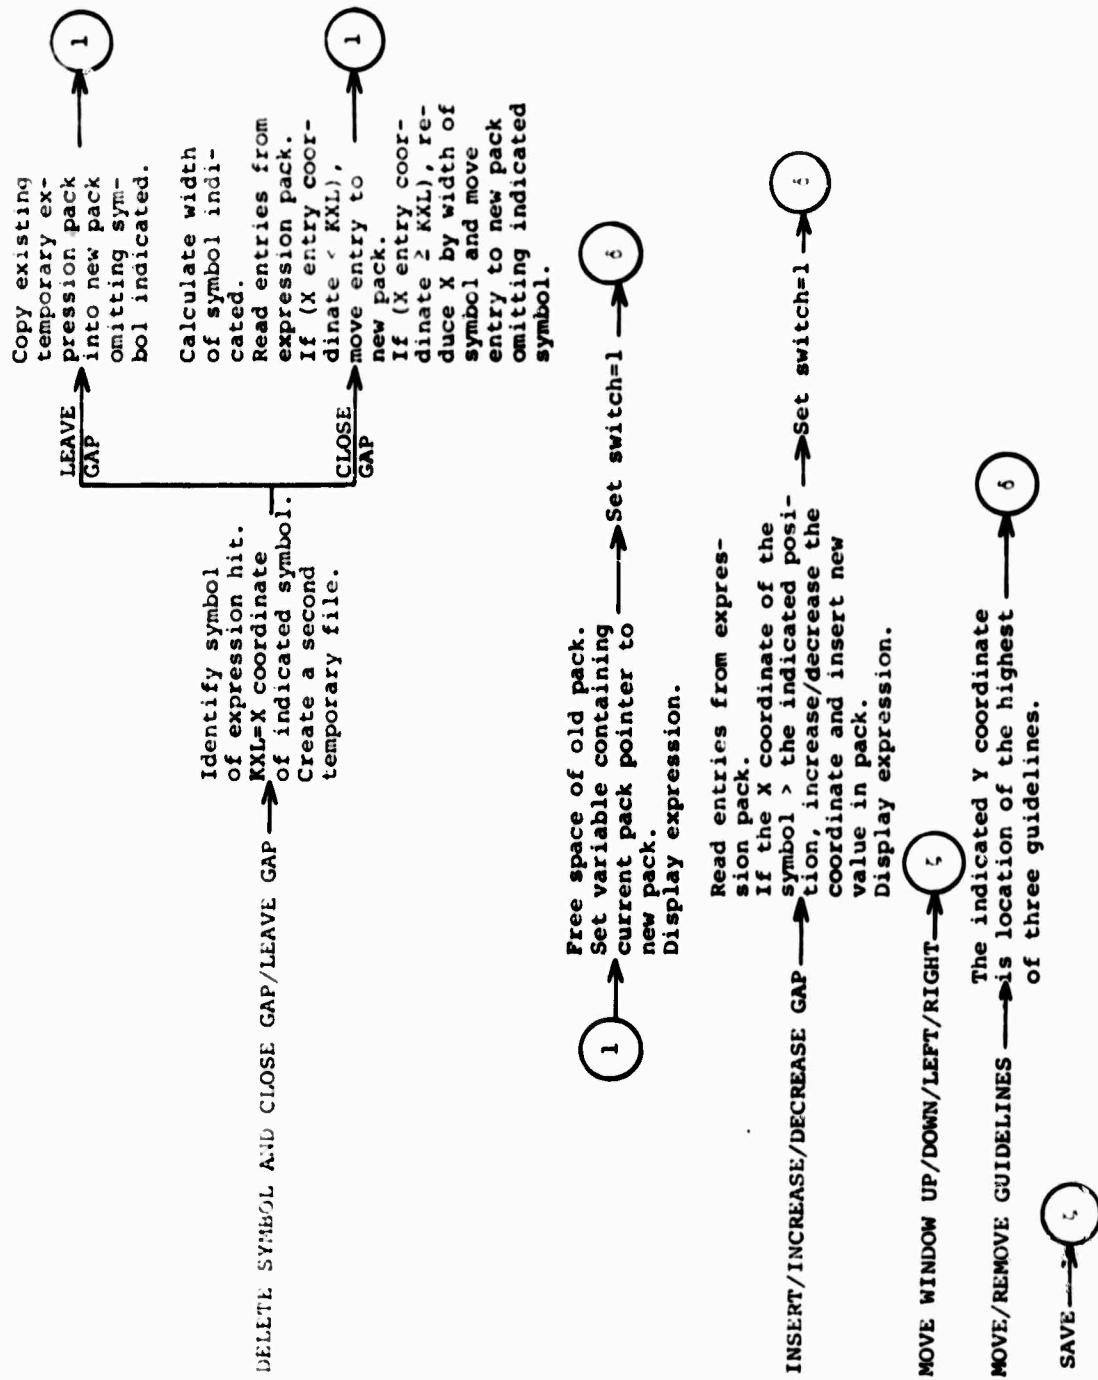


Figure 4. Subroutine DPDEF, continued



**Figure 4.** Subroutine DPDEF, concluded

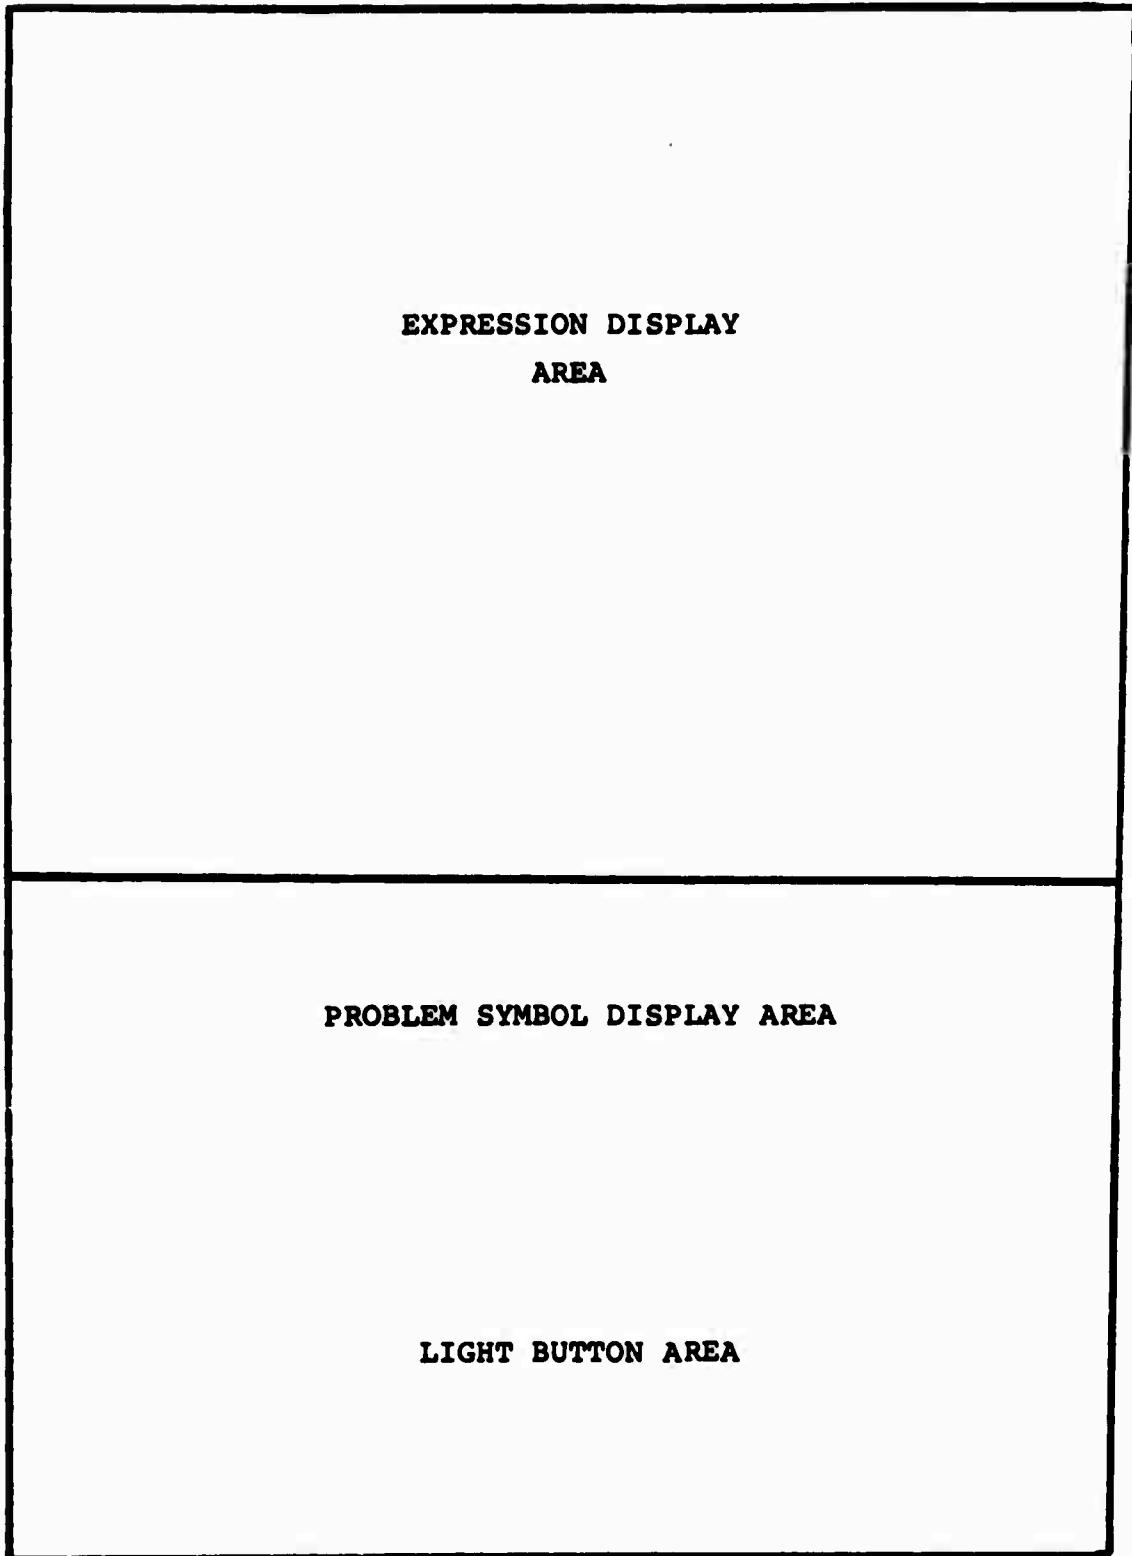


Figure 5. Display Screen for DFDEF

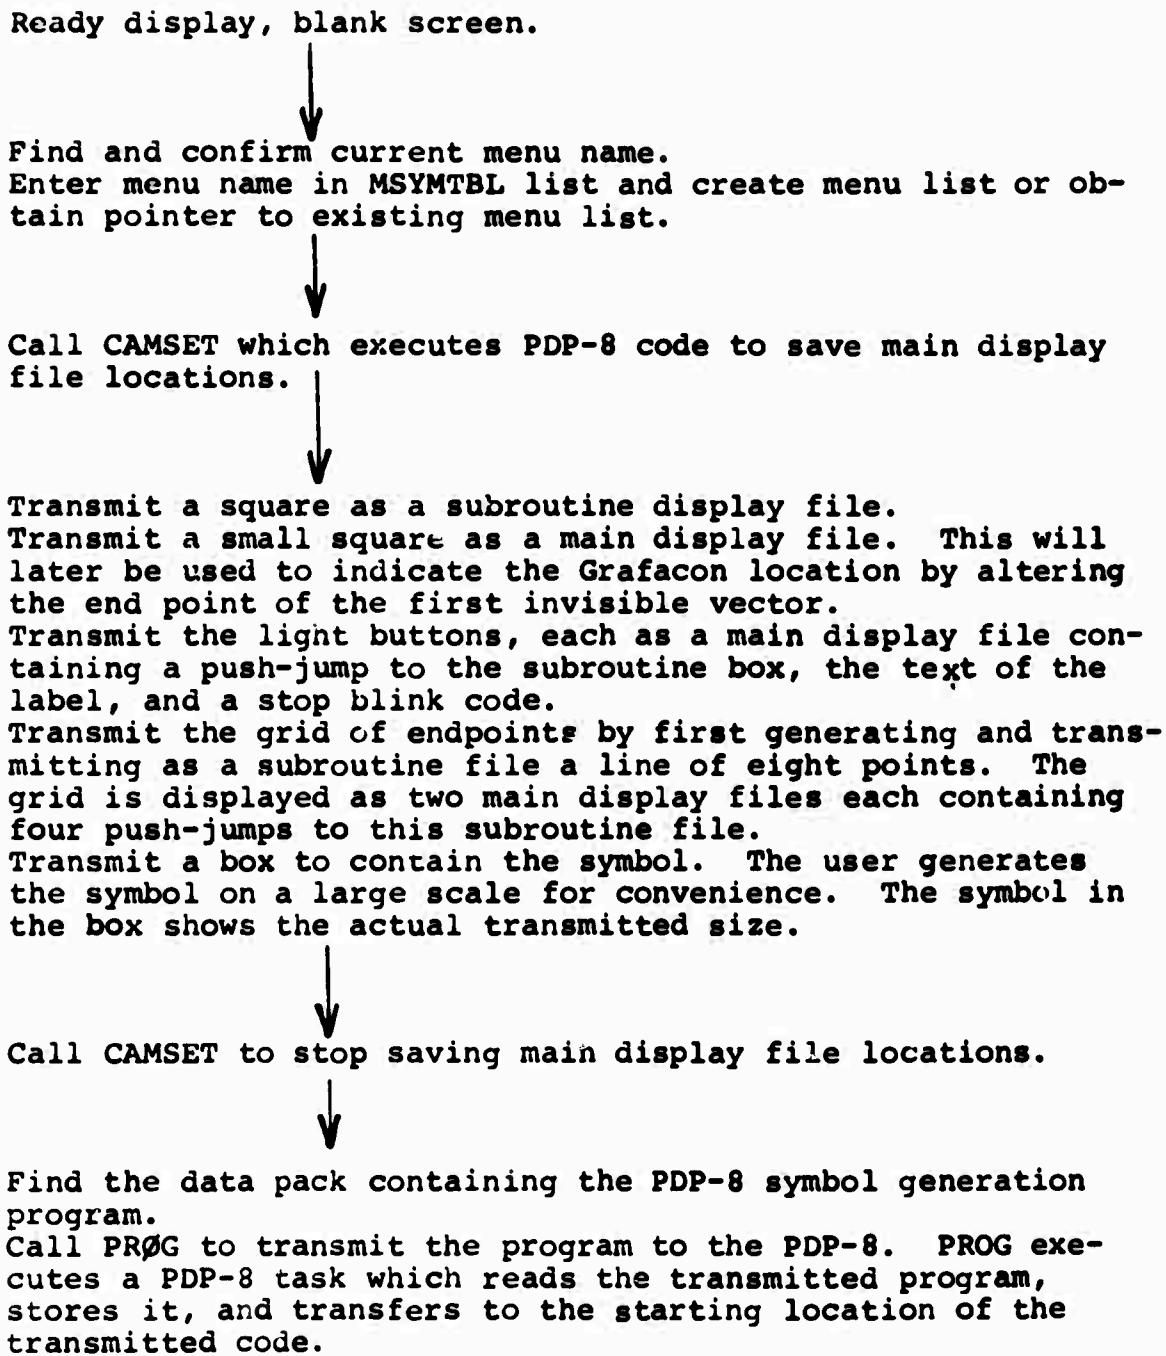


Figure 6. Subroutine DCSYM.

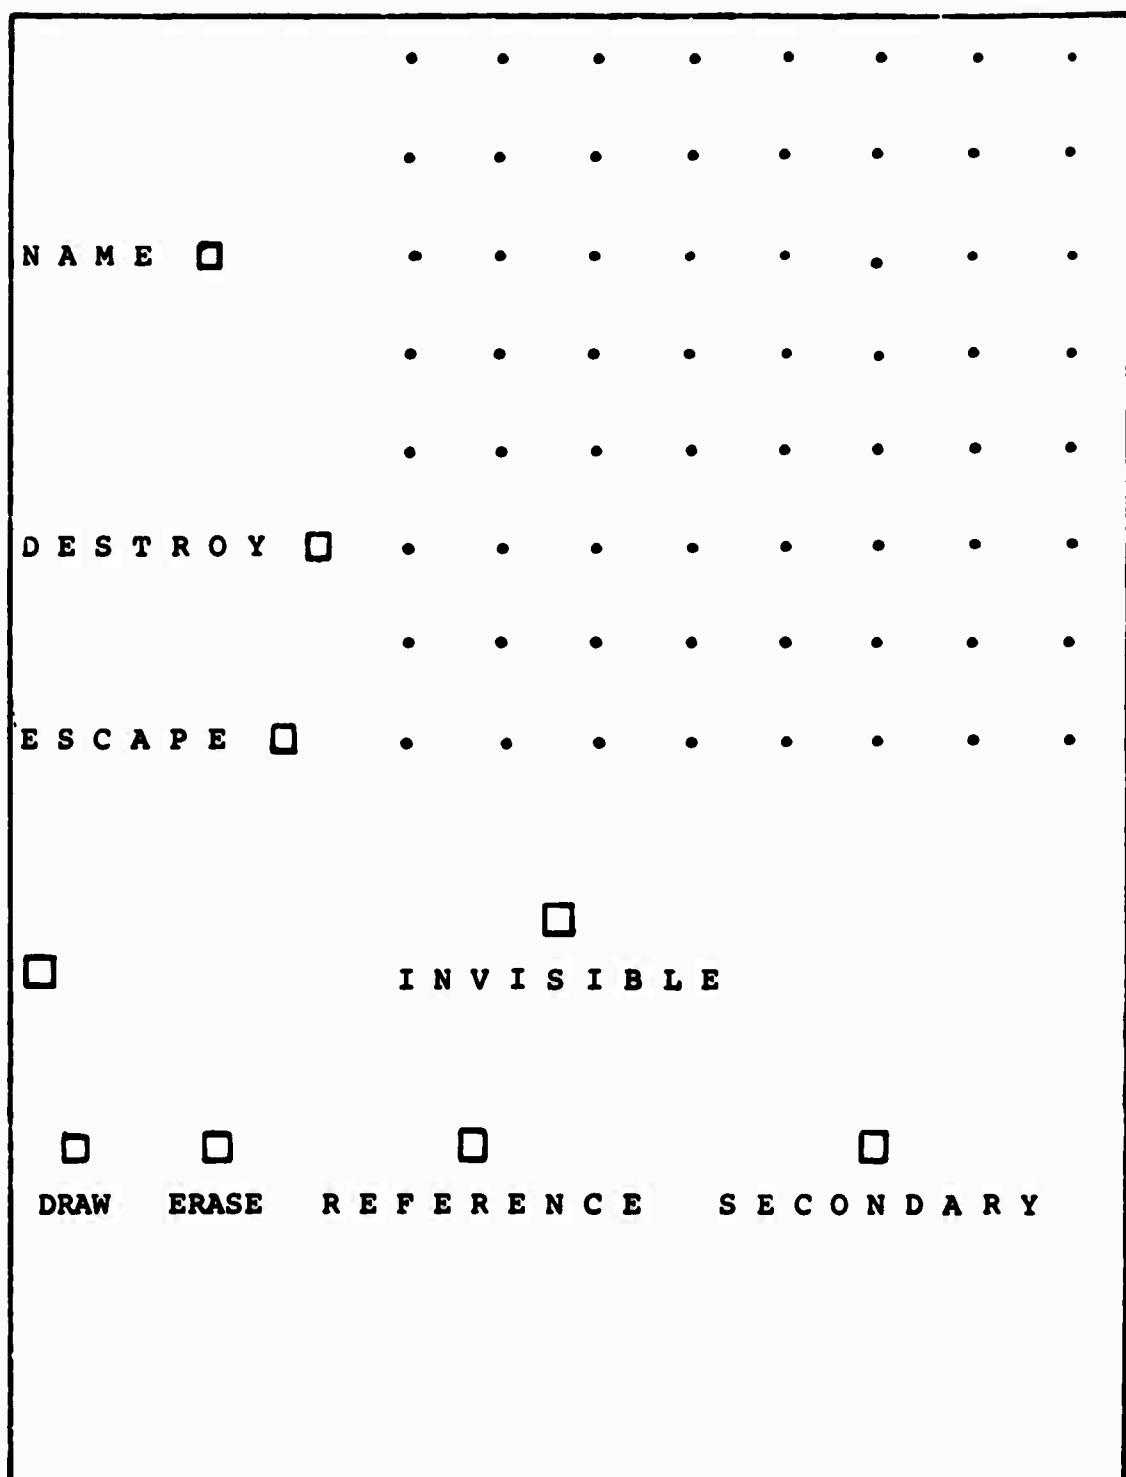


Figure 7. Display Screen for DCSYM

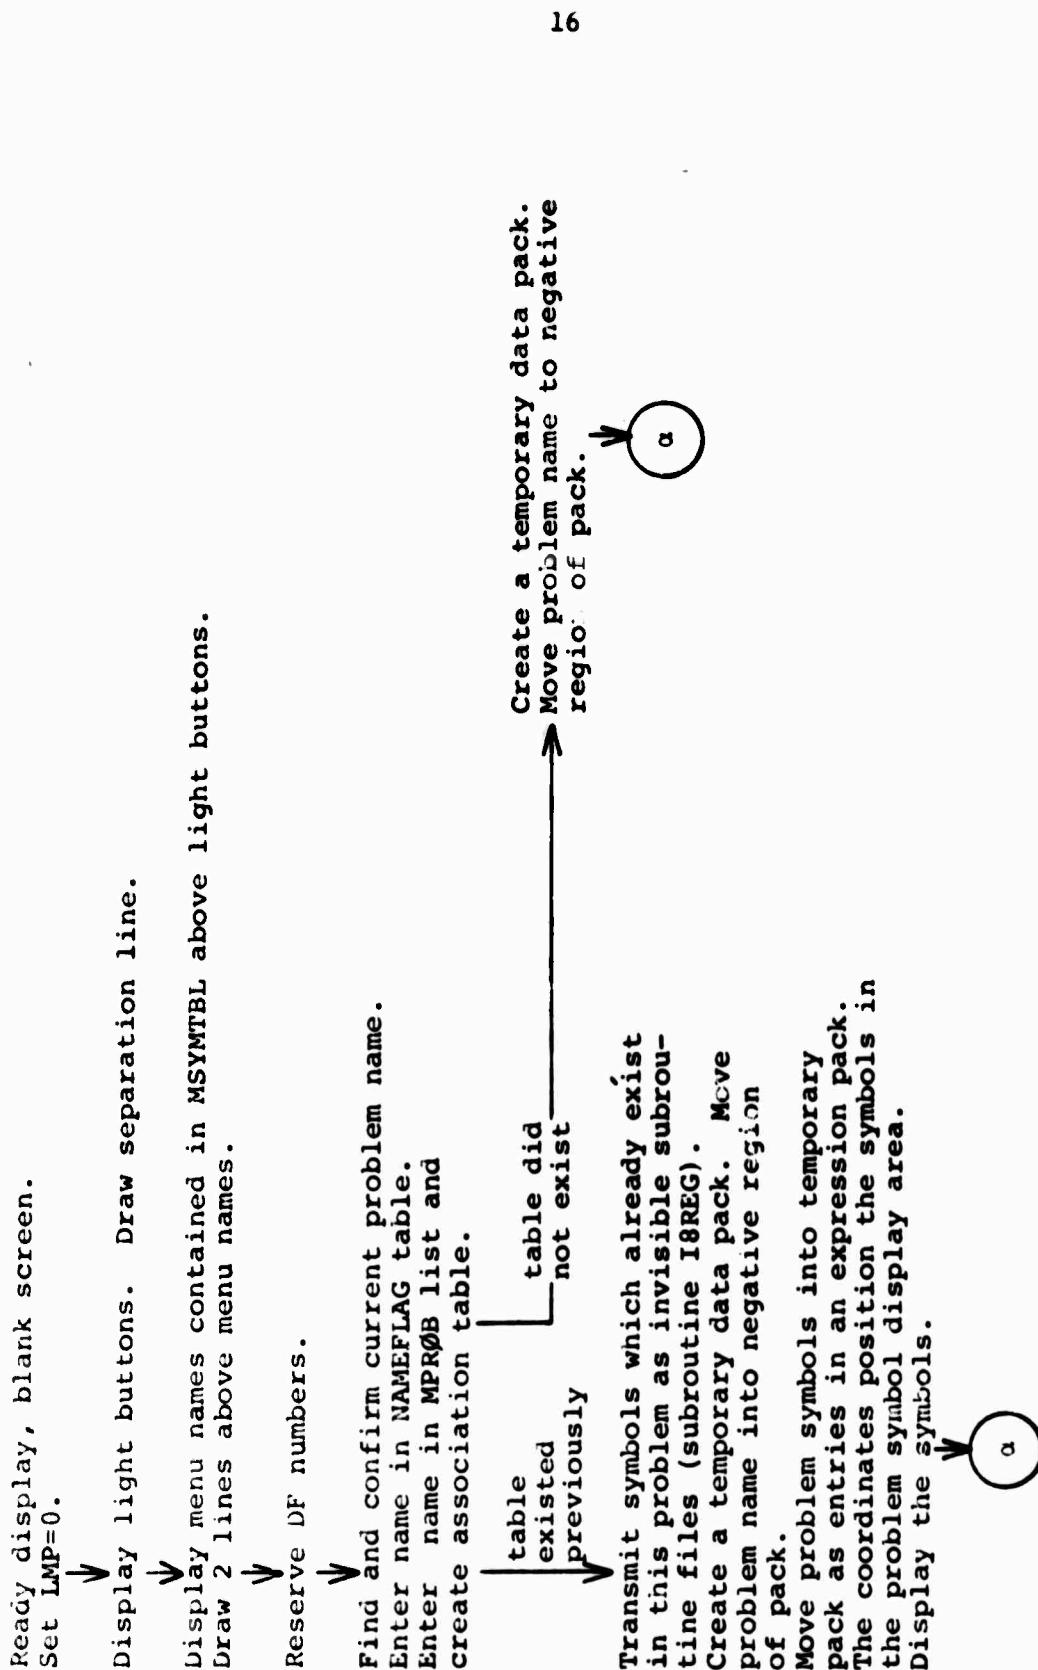
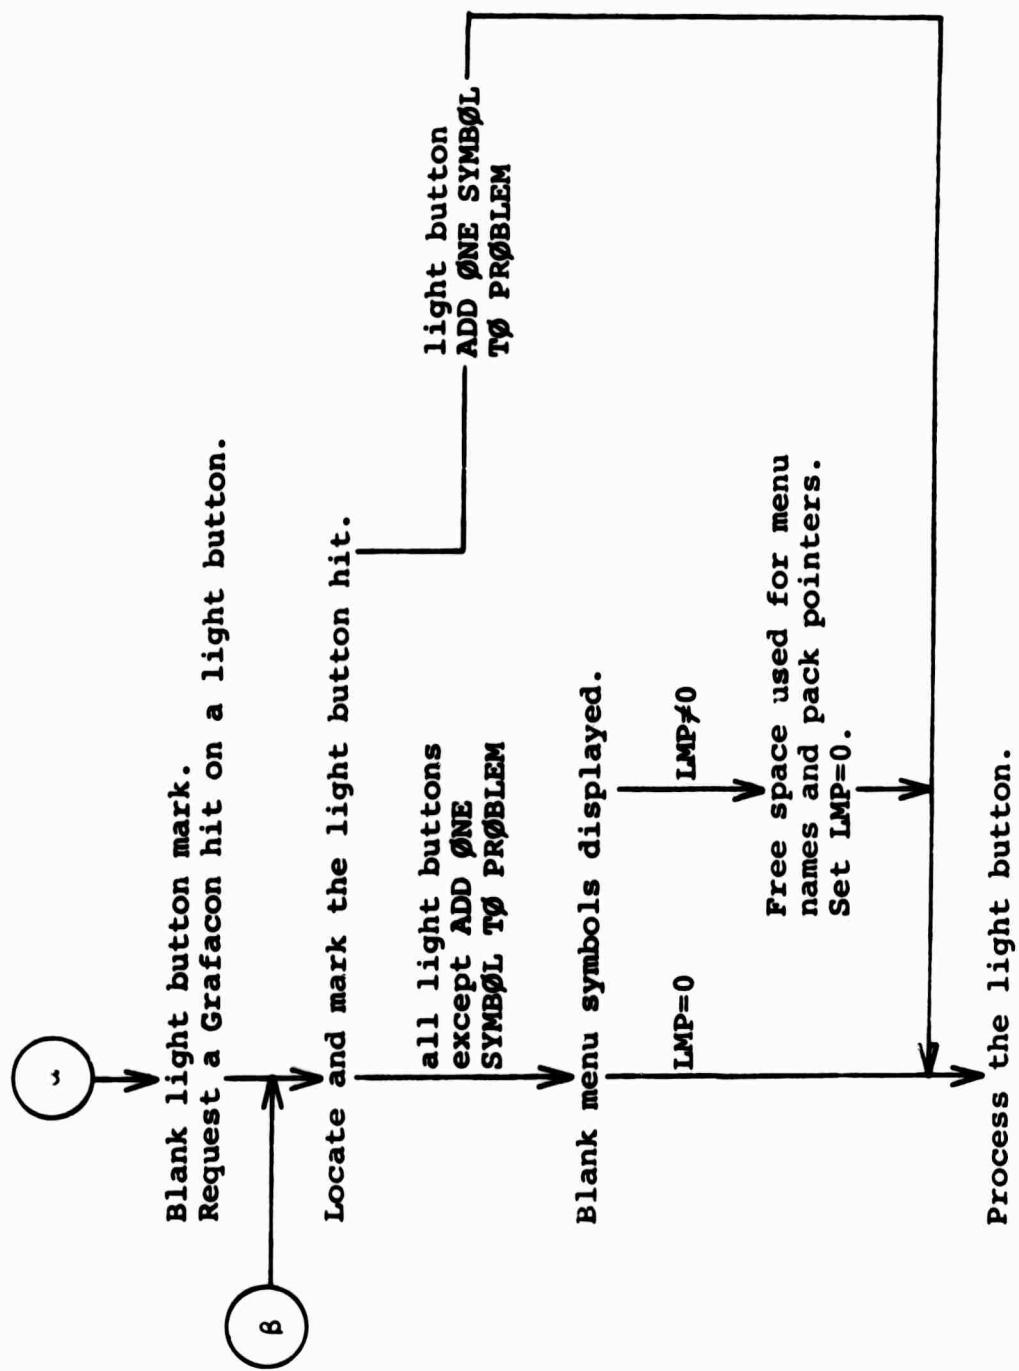


Figure 8. Subroutine DSYSEL.



**Figure 8.** Subroutine DSYSEL, continued

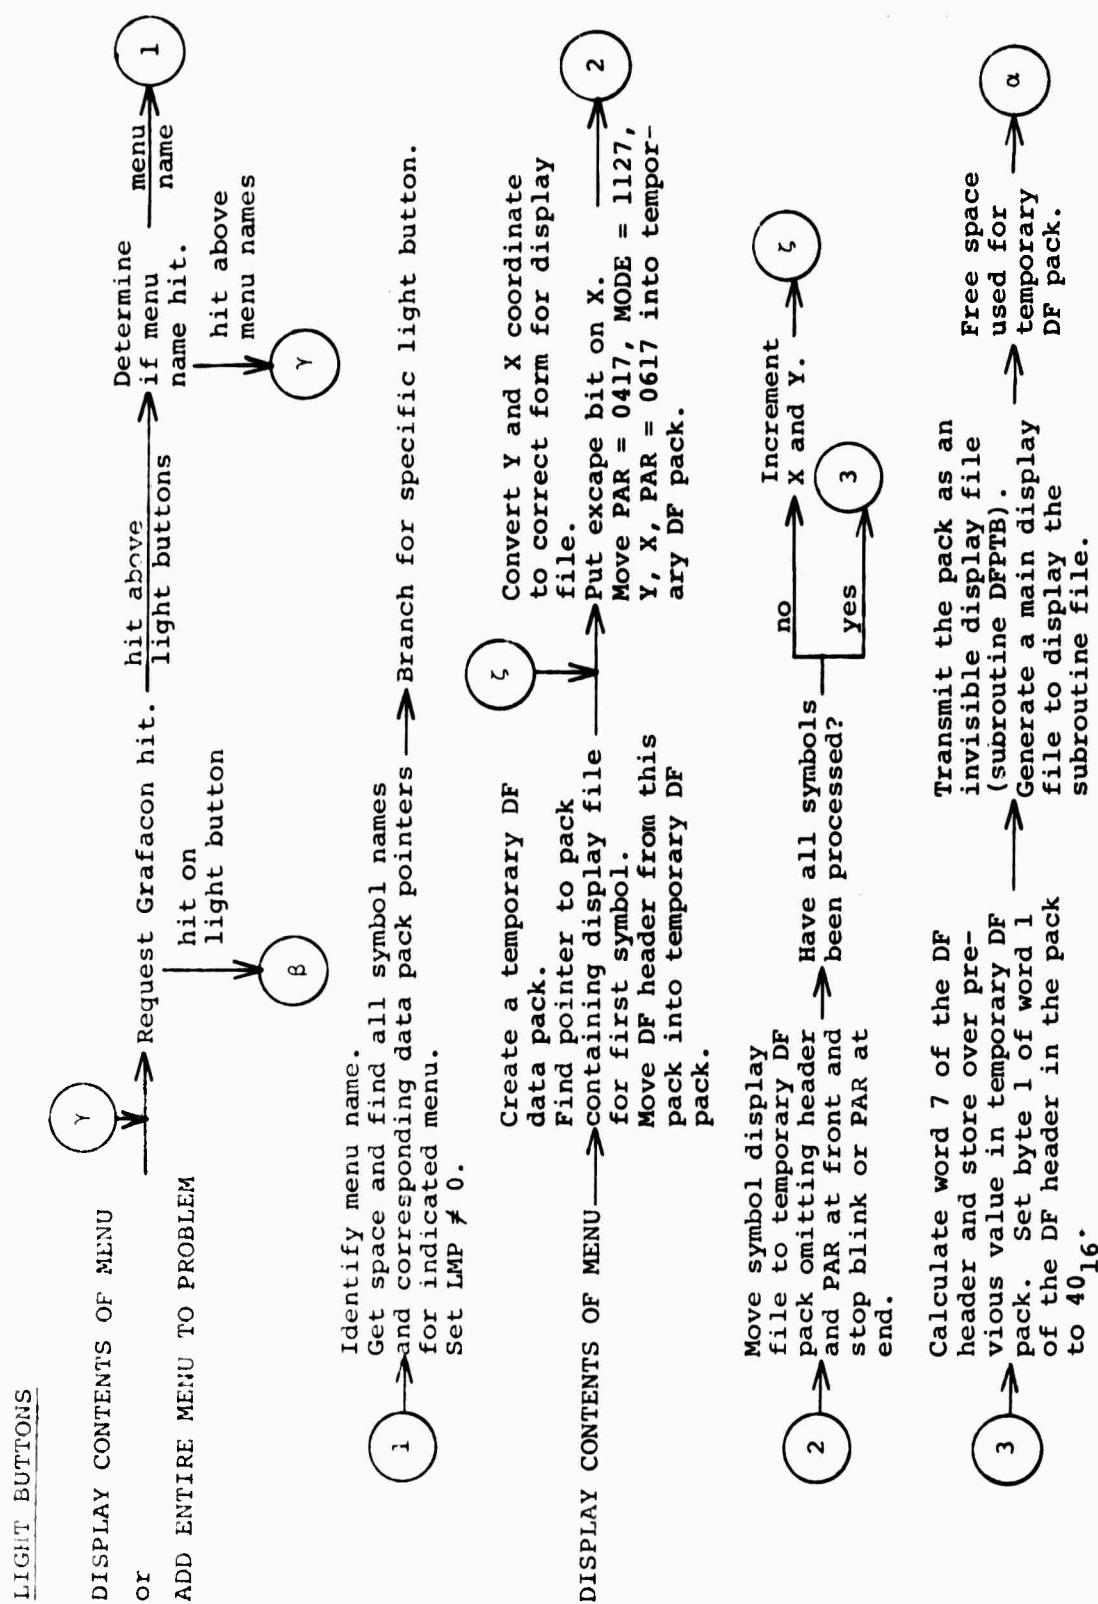


Figure 8. Subroutine DSYSEL, continued

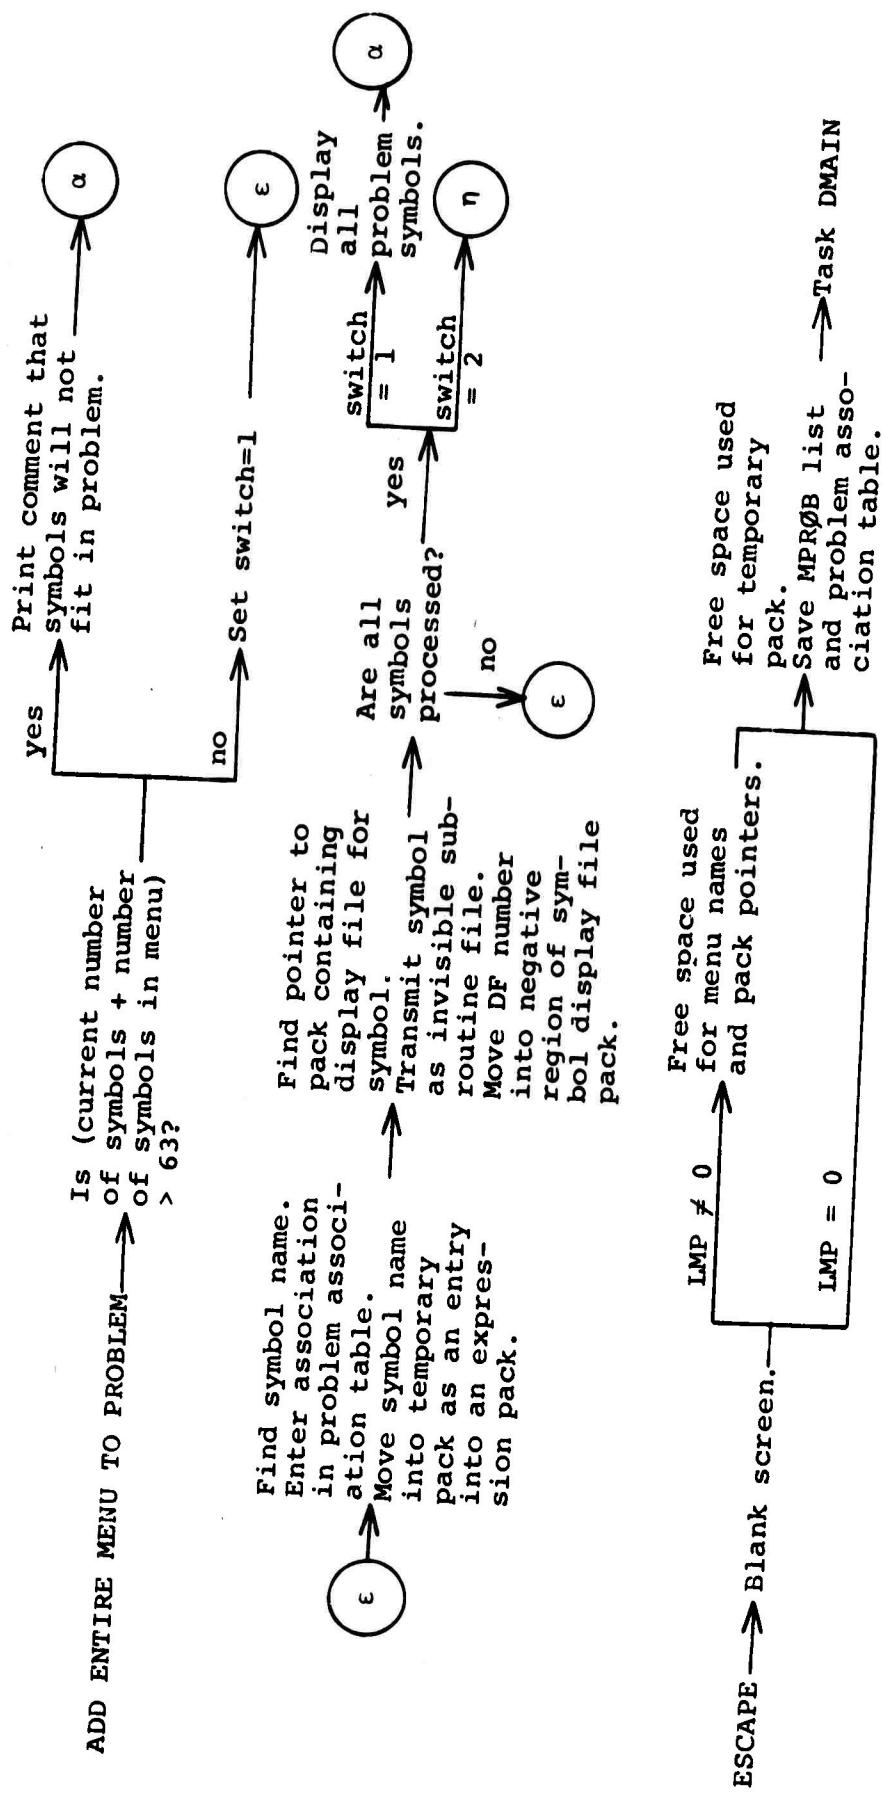
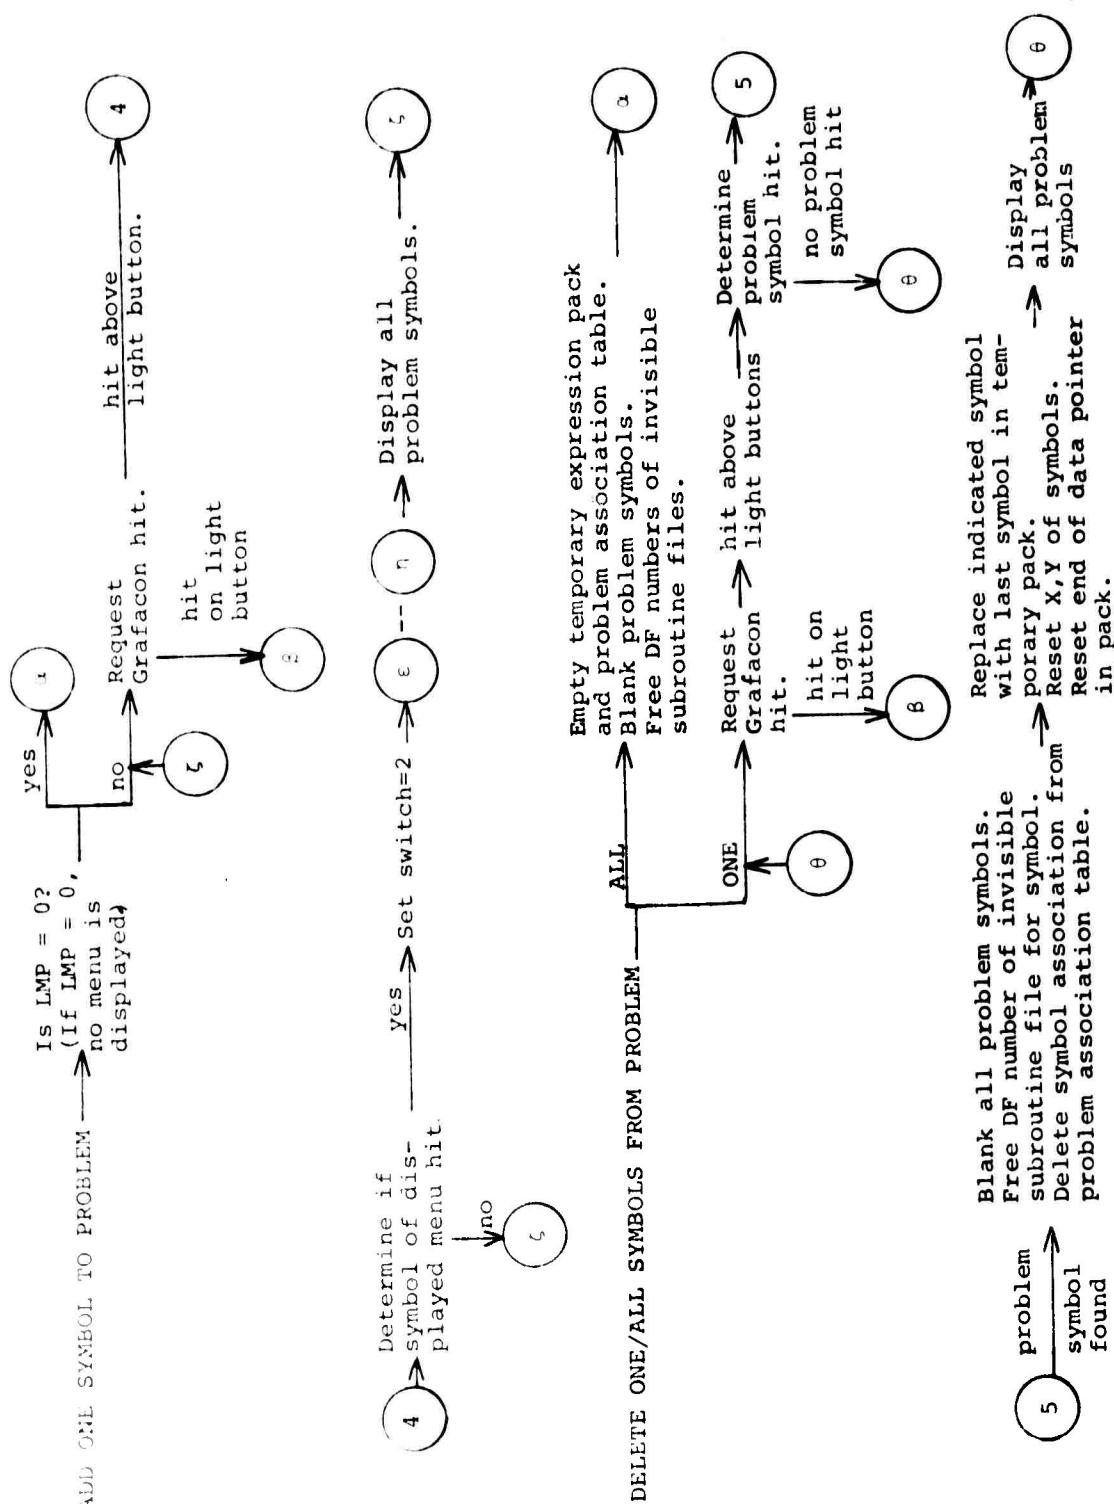


Figure 8. Subroutine DSYSEL, continued



**Figure 8.** Subroutine DSYSYL, concluded

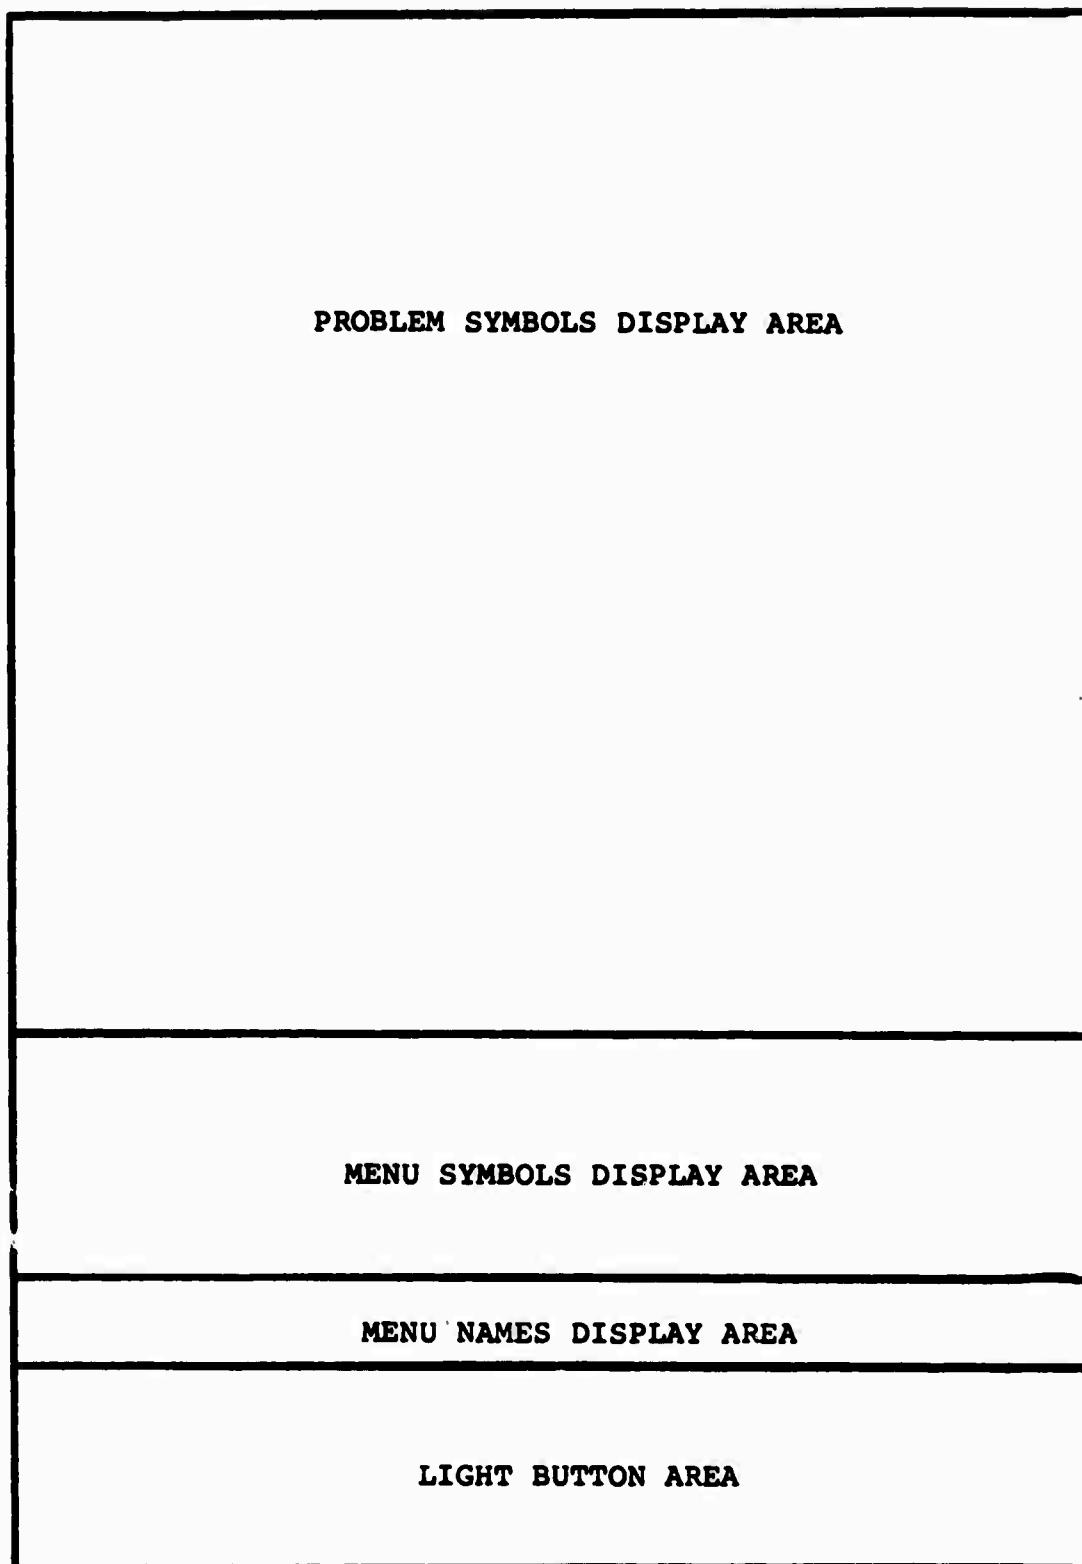


Figure 9. Display Screen for DSYSEL

### 2.3 SUBROUTINES USED IN DPRØB COMMAND.

Subroutine SE8 is used to display a string of symbols contained in a data pack with entries as shown in Fig. 2. The string could be an expression, entries in a matrix, or a list. The subroutine has one entry point, SE8MY, which can be used to set the minimum Y value to be displayed. This prevents the string from displaying over light buttons or other information located at the bottom of the screen. The execution of SE8 and SE8MY is outlined in Fig. 10.

Subroutine EXØRD orders one expression data pack into another with increasing X, then increasing Y as outlined in Fig. 11.

Subroutine EXLØC examines an expression data pack and returns the displacement to the entry located at a specified coordinate position (see Fig. 12). The entries in the data pack are not in any particular order.

Subroutine INIT8 locates and transmits all the symbols of a problem as invisible display files. The DF numbers are acquired dynamically and then saved for reference in the negative region of the symbol display file data pack. The entry point I8REG also saves the DF numbers in an array with the array subscript equivalent to the position in the problem association table. The execution of INIT8 and I8REG is outlined in Fig. 13.

**Arguments:**

LPK = pointer to expression data pack,  
 NUM = display file number for expression.

Retrieve problem name from negative region of pack.  
 Find pointer to problem association table.

Blank display file NUM.  
 Initialize display file.



Read entry from LPK.

entry

end of pack

Transmit display  
files with DF

return number NUM.

yes

no → a

Are values of X and Y coordinates within display area?

Find name of menu containing this symbol from problem association table.

Find pointer to menu name list.

Find pointer to symbol display file data pack in menu name list.

Find invisible subroutine display file number in negative region of symbol display file data pack.

Enter Y, X with escape, PAR to reset the scale, a push-jump to the symbol subroutine file, and standard PAR and MODE into the expression display file.

Reset the internal DF light-beam coordinates.



Entry SE8MY in subroutine SE8.

**Argument:**

MY = minimum Y for display area.

Set minimum Y to be used for display area lower bound in SE8.

Figure 10. Subroutine SE8.

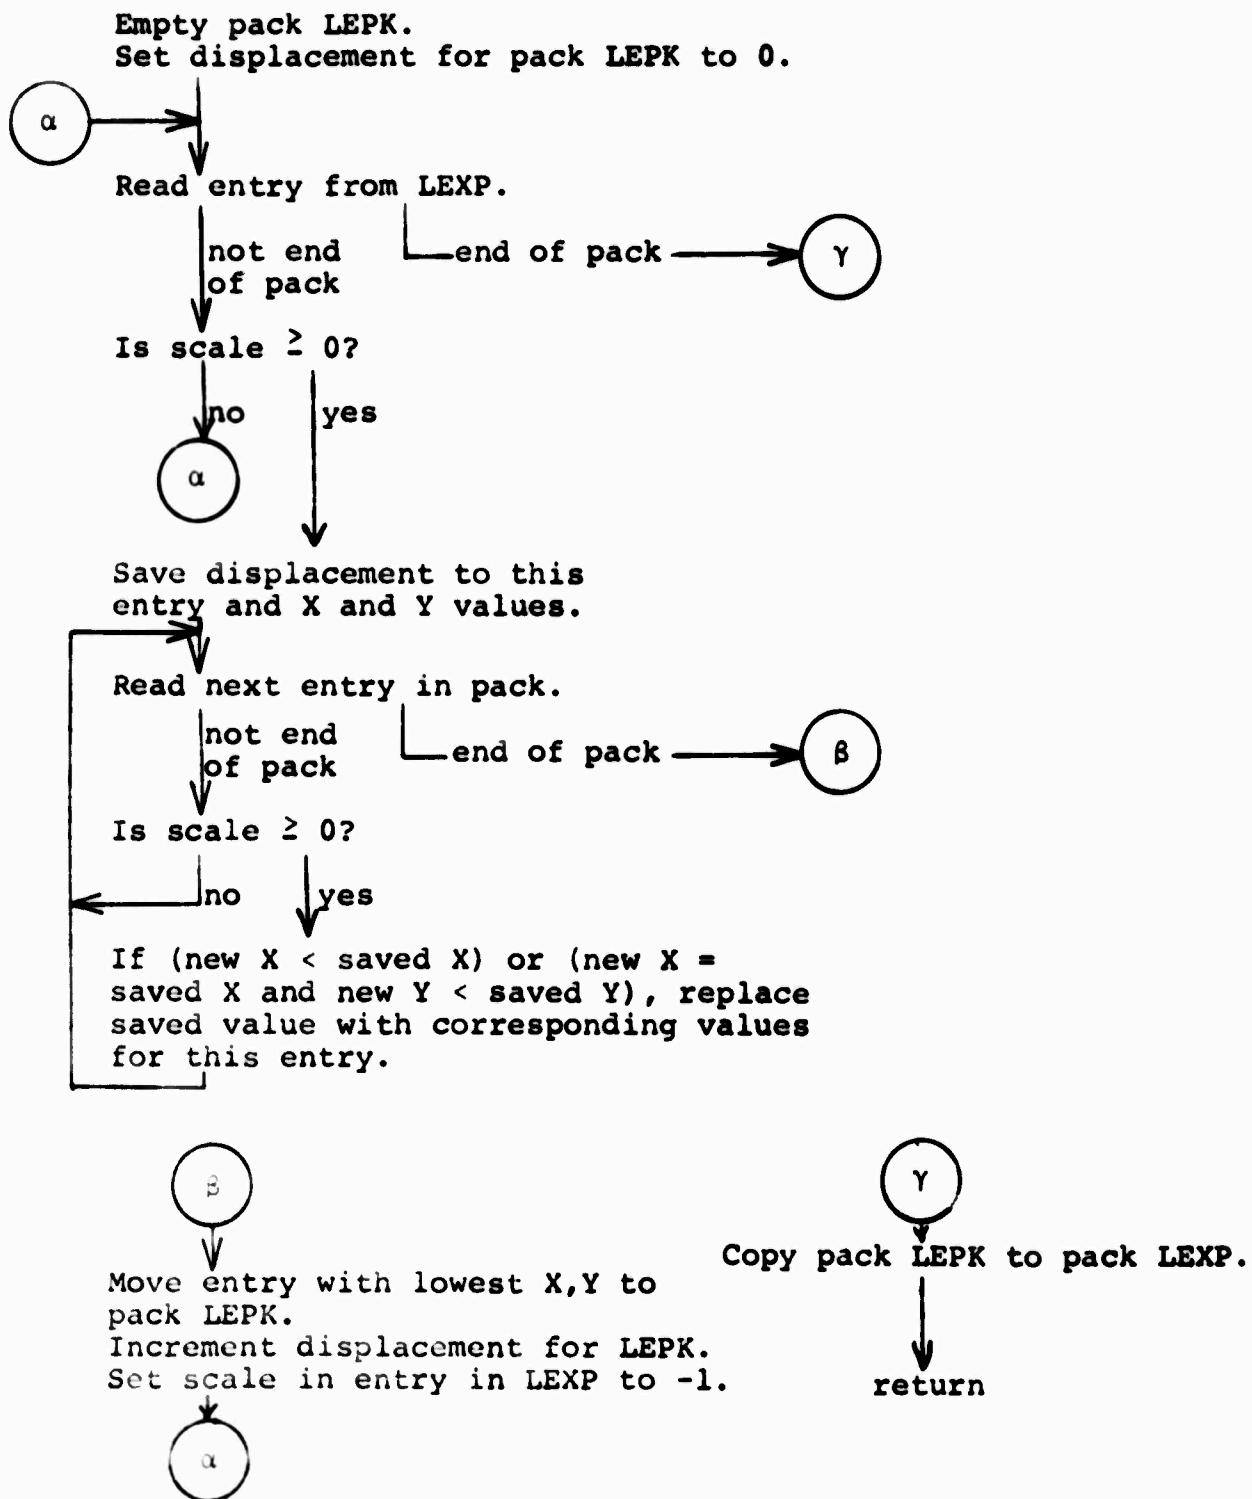
**Arguments:****LEXP** = pack to be ordered,**LEPK** = pack to contain the result of ordering.

Figure 11. Subroutine EXORD

**Arguments:**

IXL, IYL = position usually of Grafacon hit,  
 LEXP = expression data pack,  
 KDIS = displacement.

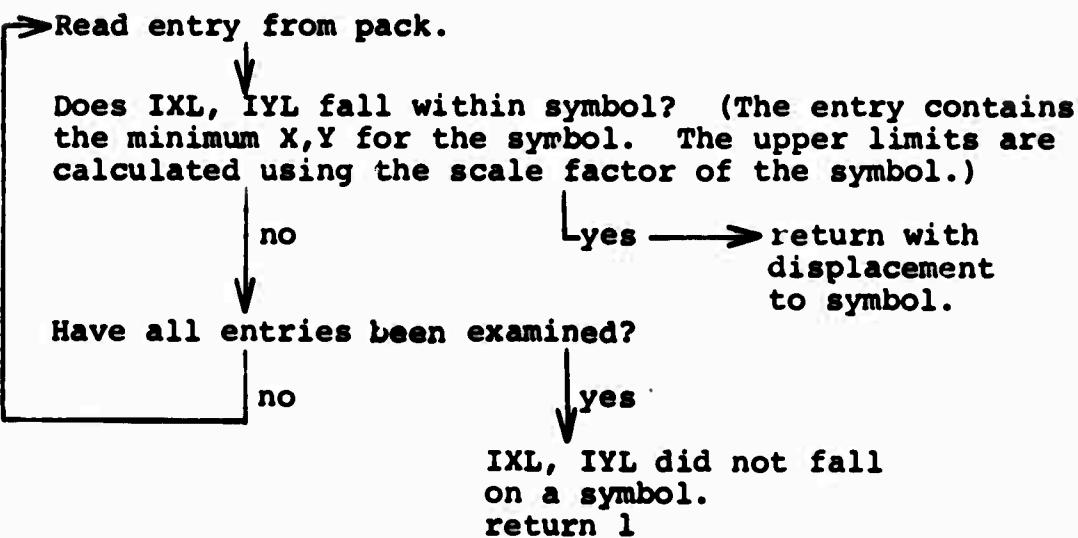


Figure 12. Subroutine EXL/C

**Arguments:**

SPRØ = problem name.

NSUB = array to save subroutine display file numbers.

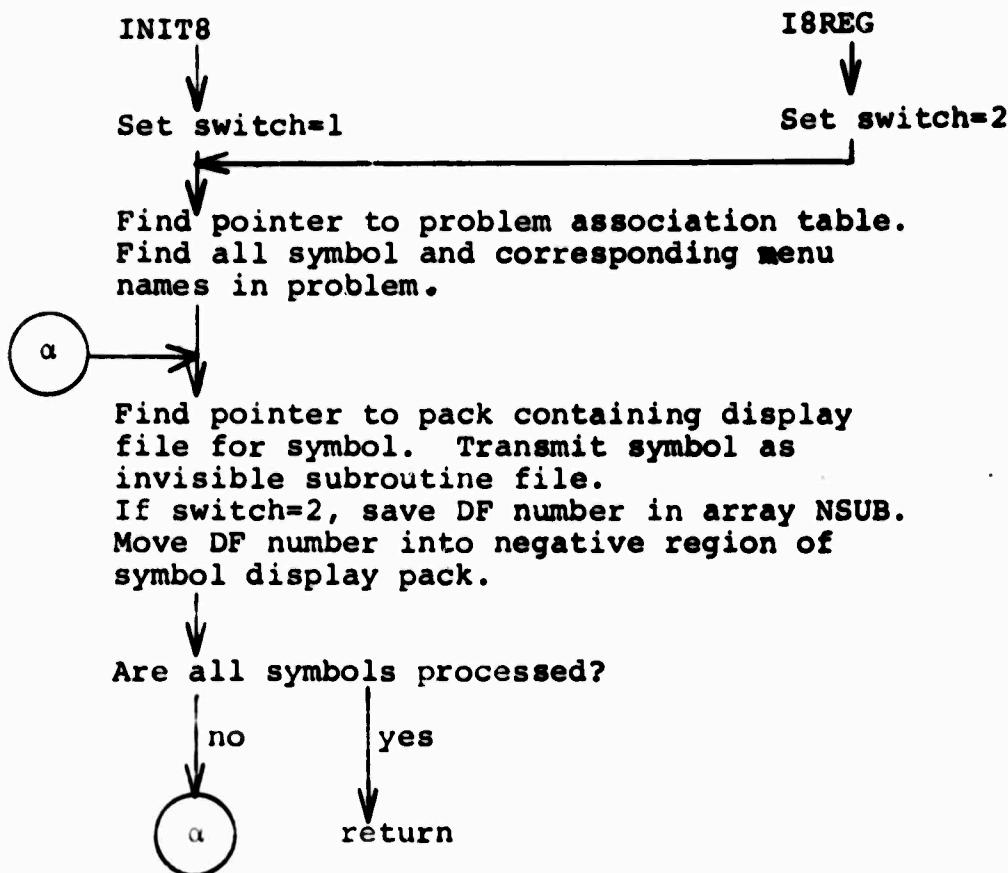


Figure 13. Subroutine INIT8

Subroutine FONE is used to define and mark entities. The user indicates the position of the entity marks--above or below the expression--and points to the first and last symbols to be included in the entity. The expression is blanked and redisplayed with the indicated group of symbols marked.

The subroutine exists as a routine independent of CAMA in file FONE with changes necessary to task under CAMA indicated on the listing. A test program is located in FONE (-100,-97). The object of the subroutine only is in FONEO. The RUN command is  
RUN (test)+FONEO+MATH+SAVE:XDF+SAVE:CAMA/L 2=SS73:TSAV2.  
The execution sequence of the subroutine is outlined in Fig. 14. The display screen is illustrated in Fig. 15.

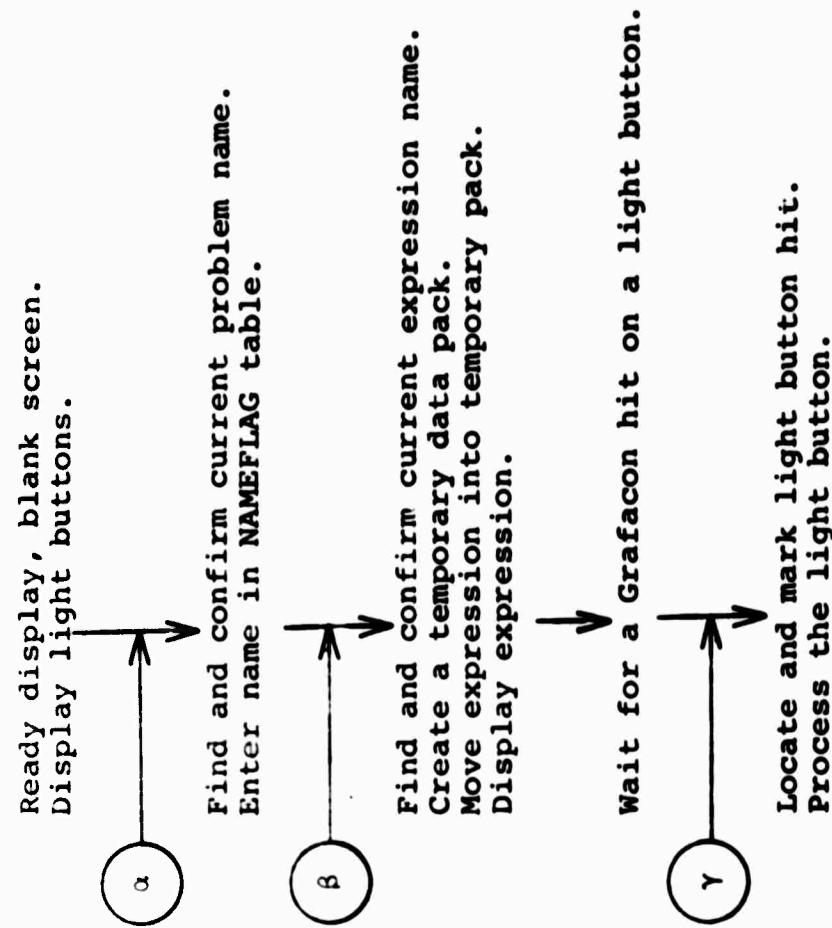
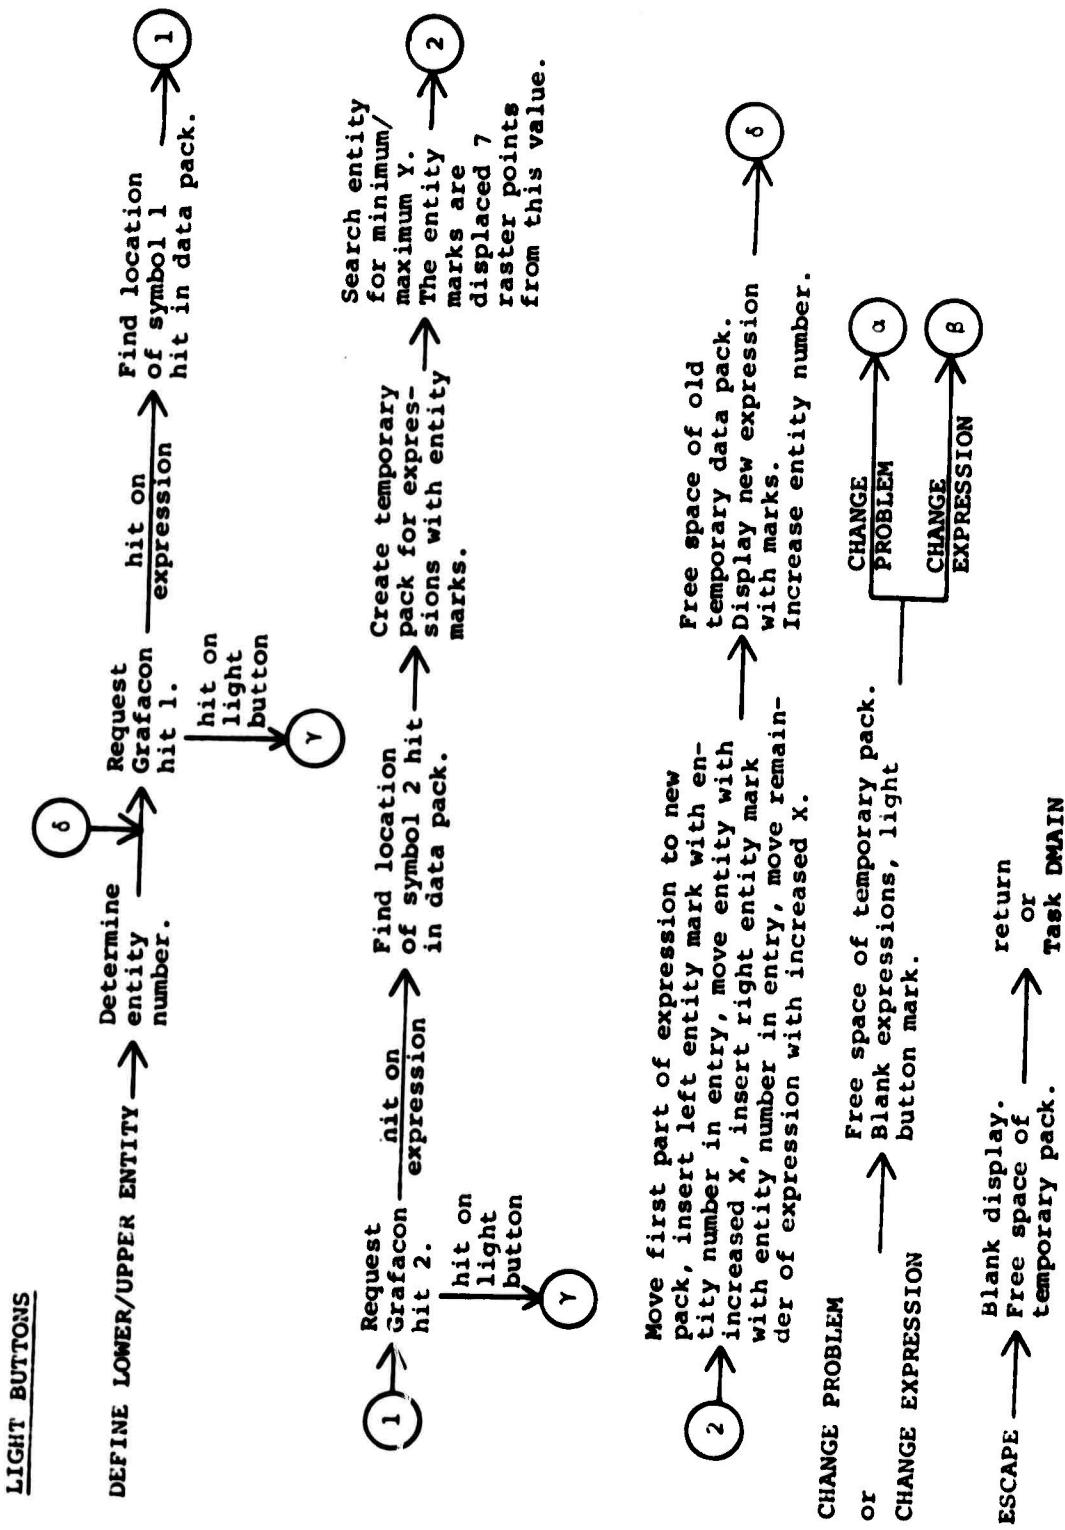


Figure 14. Subroutine EX0NE



**Figure 14.** Subroutine EXONE, concluded

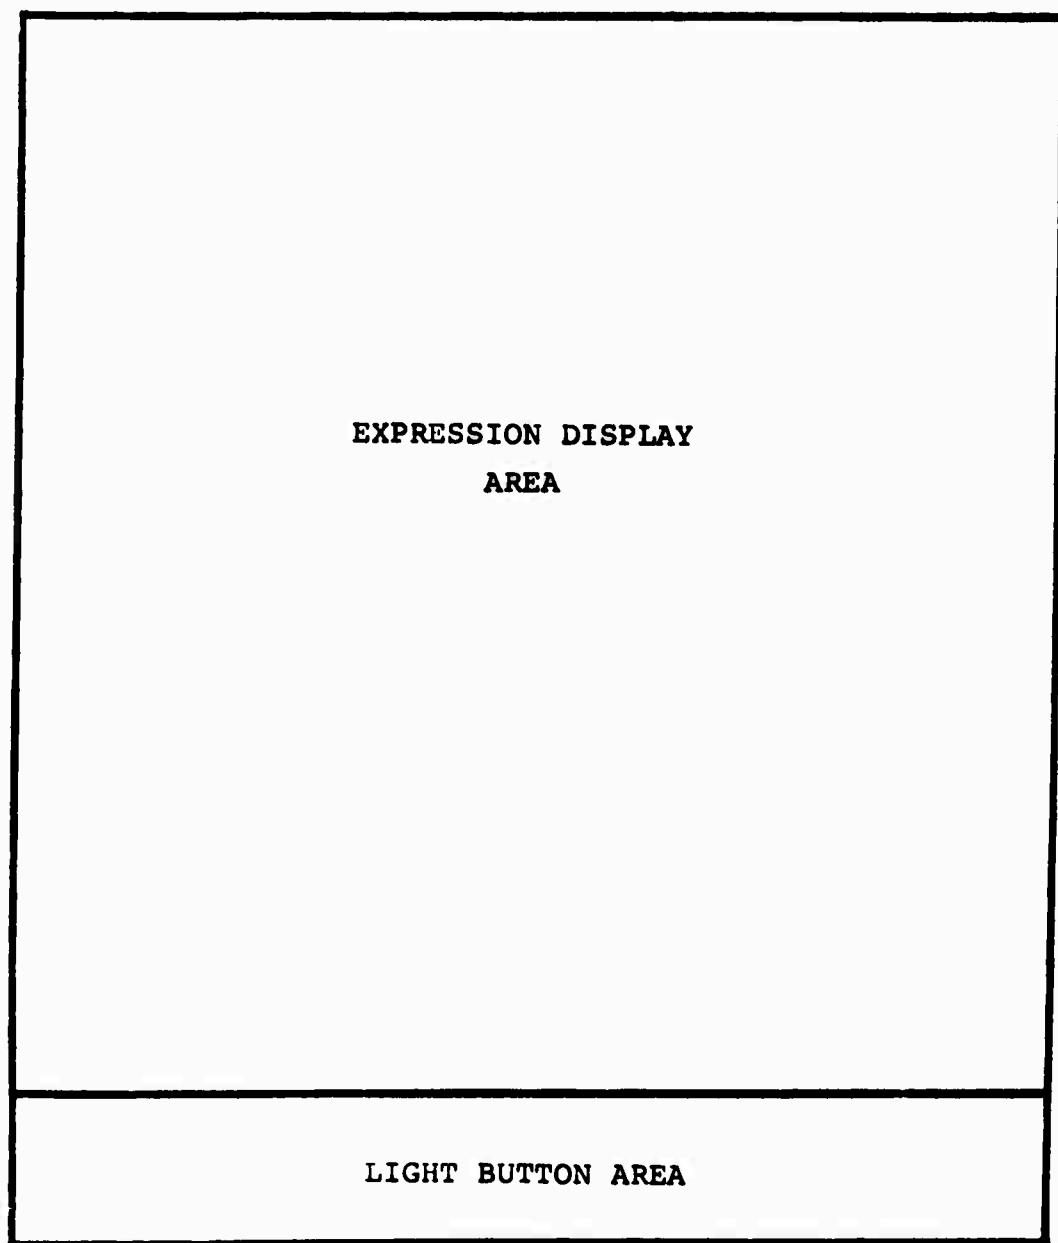


Figure 15. Display Screen for FONE

## REFERENCES

1. Cocanower, A.B., The DF Routines User's Guide, Memorandum 23, Concomp Project, University of Michigan, Ann Arbor, May 1969.
2. Bisgrove, J.L., Goodrich, S.D., Symbol Generation, Internal Memorandum, Concomp Project, University of Michigan, Ann Arbor, June 22, 1970.

**UNCLASSIFIED**

Security Classification

**DOCUMENT CONTROL DATA - R & D**

(Security classification of title, body or abstract and individual information must be entered here if the overall report is classified)

1. ORIGINATING ACTIVITY (Corporate author)		2a. REPORT SECURITY CLASSIFICATION <b>Unclassified</b>
THE UNIVERSITY OF MICHIGAN CONCOMP PROJECT		2b. GROUP
3. REPORT TITLE  <b>CAMA: DEFINE PROBLEM COMMAND</b>		
4. DESCRIPTIVE NOTES (Type of report and inclusive dates) <b>Memorandum 28</b>		
5. AUTHOR(S) (First name, middle initial, last name)  <b>SUZANNE D. GOODRICH</b>		
6. REPORT DATE <b>June 1970</b>	7a. TOTAL NO. OF PAGES <b>31</b>	7b. NO. OF REFS <b>2</b>
8a. CONTRACT OR GRANT NO. <b>DA-49-083 OSA-3050</b>	5a. ORIGINATOR'S REPORT NUMBER(S) <b>Memorandum 28</b>	
b. PROJECT NO.  c.  d.	9b. OTHER REPORT NO(S) (Any other numbers that may be assigned this report)	
10. DISTRIBUTION STATEMENT  Qualified requesters may obtain copies of this report from DDC.		
11. SUPPLEMENTARY NOTES	12. SPONSORING MILITARY ACTIVITY <b>Advanced Research Projects Agency</b>	

13. ABSTRACT

The Computer-Aided Mathematical Analysis system (CAMA) permits construction of symbols and expressions, manipulation of expressions, and solution of equations. CAMA operates under MTS in the IBM 360/67 and RAMP in the PDP-8/338 terminal. CAMA operations are divided into tasks which may be inserted into the queue via commands.

The command DPRØB is used to define a problem. The user selects symbol. to use in the problem, constructs symbols if necessary, and formulates the expressions which comprise the problem.

14.  KEY WORDS	LINK A		LINK B		LINK C	
	ROLE	WT	ROLE	WT	ROLE	WT
define problem data structure display expression symbol						